


Drawing # RL3

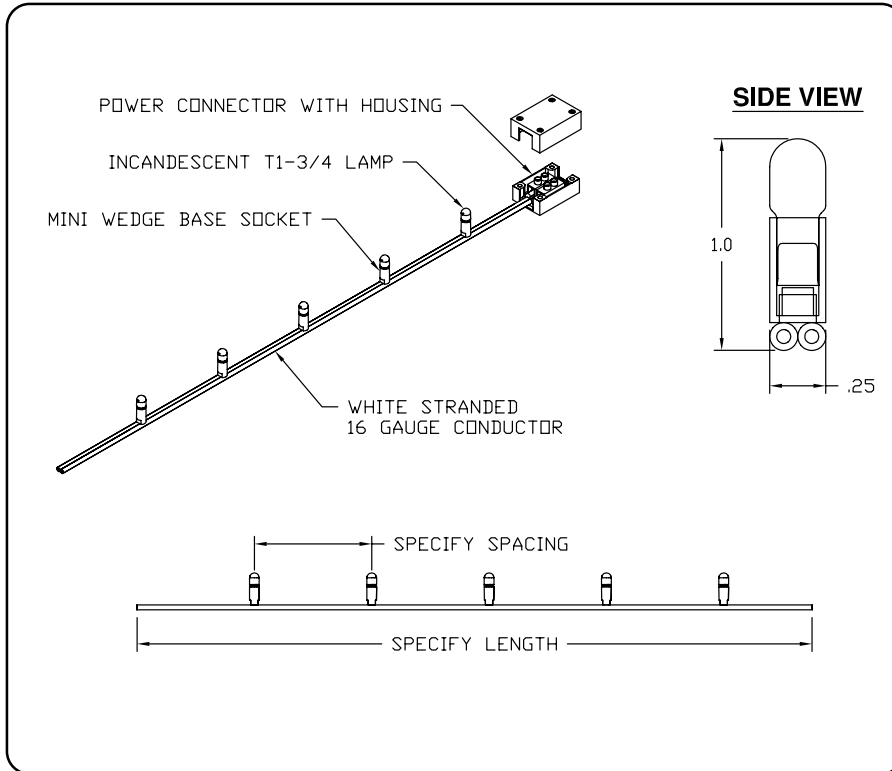

**Product Information**

**Applications:** Accent, Linear, Decorative Lighting  
**Volts:** 12V or 24V  
**Lamps:** See Lamp Specifications  
**Lamp Life:** See Lamp Specifications  
**Socket:** White Wedge Base  
**Wire Color:** White 16/2 Wire

**Indoor or Outdoor Applications**

- Amusement Industries**  
Night Clubs, Movie Theatres
- Recreation Industries**  
Hotels, Restaurants, Casinos
- Architectural Industries**  
Interior Decor, Shopping Centers
- Construction Industries**

**Lamp Specifications**

Catalog #	Description	Volts	Watts	Lamp Life Hrs.	Max. Lamps Per Run	2" O/C	3" O/C	4" O/C	6" O/C	12" O/C
#18	0.48 Watt Incandescent	12	0.48	22,500	250	41'	62'	83'	125'	250'
#73	0.96 Watt Incandescent	12	0.96	67,500	125	20'	31'	41'	62'	125'
#85	0.95 Watt Incandescent	24	0.95	112,500	250	41'	62'	83'	125'	250'
#17	1.5 Watt Incandescent	24	1.5	22,500	160	26'	40'	53'	80'	160'
#803	2.5 Watt Incandescent	24	2.5	4,500	96	16'	24'	32'	48'	96'

**Specifier:** \_\_\_\_\_  
**Product Code:** Series /Spacing/ Lamp /Volts  
 RL5300 / / /  
**Project:** \_\_\_\_\_  
**Type:** \_\_\_\_\_  
**Date:** \_\_\_\_\_

**Application and Construction**

Designed to utilize incandescent lamps, RimLite 5300 Series provides many desirable features. Of primary importance is the parallel wiring. If one lamp goes out, only that lamp is not working. The rest of the lamps continue working. The long lamp life of incandescent lamps are excellent for the hard to reach places for future lamp replacement. White wire helps give a sophisticated look on exterior areas.

RimLite is mounted with easy to install tie wraps. RimLite can be easily field cut for an easy and fast installation not requiring exact field dimensions.

RimLite is excellent to illuminate areas for decorative, rim, accent, linear lighting, etc.

Suggested spacing is 12" for accent lighting on building exteriors. To create a cove like effect with even illumination, 3" or 4" on center is excellent.

**Electrical**

RimLite 5300 is a 12 or 24 volt system with a 10 amp (16 gage) capacity. RimLite requires a 12 or 24V (secondary side) transformer. The standard transformer primary side voltage is 120 volts. Consult factory for other voltages.

**Accessories**

RimLite 5300 has a variety of lamps to choose from. See Lamp Specifications.