


Drawing # ALS210T-LP

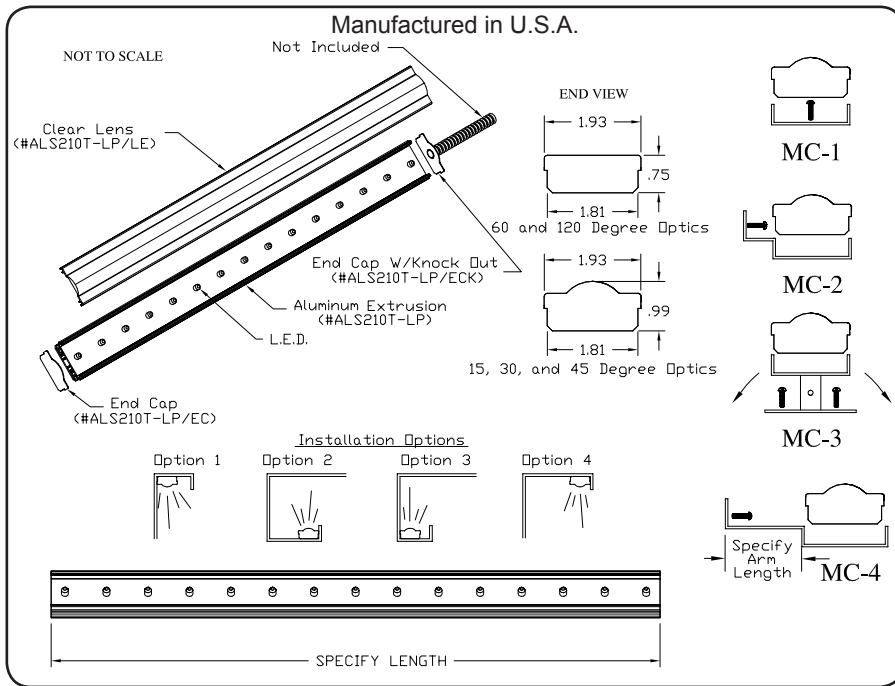

<b>Fixture Type</b>	
---------------------	--

### Product Features

- Applications:** Indoor and Outdoor
- Voltage:** 120V or 277V
- Lamp Type:** High Output LEDs
- Length:** Built to Order
- Construction:** Aluminum Extrusion
- Light Output:** Refer to IES Files
- Mounting:** Clip-on Brackets
- Listing:** Dry and Wet Location
- Dimming:** Available

### LED Specifications

Lamp #	Description	L70 LED Life
LED-2.7K	2700K Warm White LED	50,000 hrs.
LED-3.0K	3000K Warm White LED	50,000 hrs.
LED-3.5K	3500K Neutral White LED	50,000 hrs.
LED-4.0K	4000K Neutral White LED	50,000 hrs.
LED-4.5K	4500K Neutral White LED	50,000 hrs.
LED-5.0K	5000K Cool White LED	50,000 hrs.
LED-5.7K	5700K Cool White LED	50,000 hrs.
LED-6.5K	6500K Cool White LED	50,000 hrs.

White LEDs are available in increments of 100K from 2700K to 6500K. For example, Warm White LEDs can be specified in 2700K, 2800K, 2900K, 3000K, 3100K, 3200K, 3300K, or 3400K. Specific color temperatures can be specified by adding (2.9K) for 2900K after LED lamp number: LED-2.9K.

### How to Order or Specify

#### Product Code: (Fill in the Blanks)

____ / SP / ____ / ____ / ____ / ____ / ____ / ____ / ____								
Ex.: ALS210T-LP	SP	WH	LED-2.7K	45D	8W/DM/36"	MC-4/3"	EF	Dry
Series	Straight Pieces	Finish	LED	Beam Spread	Watts Per Foot Fixture Length	Mounting	Feed Point	Dry or Wet
ALS210T-LP	Straight Pieces	Natural (NA)	LED-2.7K	30 Degree	8 Watts (8W)	MC-1	End Feed	Indoor (Dry)
ALS210T-LPF	(SP)	Polished (PA)	LED-3.0K	(30D)	6 Watts (6W)	MC-2	(EF)	Outdoor (Wet)
F = Frosted Lens		White (WH)	LED-3.5K	45 Degree	4 Watts (4W)	MC-3	Side Feed	
		Satin (SA)	LED-4.0K	(45D)	3 Watts (3W)	MC-4/Length*	(SF)	
		Black (BK)	LED-4.5K	60 Degree	Dim (8W/DM)	*On MC-4	Bottom Feed	
		Green (GN)	LED-5.0K	(60D)	Dim (6W/DM)	Specify Arm	(BF)	
		Red (RD)	LED-5.7K	120 Degree	Dim (4W/DM)	Length in		
		Silver (SR)	LED-6.5K	(120D)	Dim (3W/DM)	Inches		

**Applications**

Designed for indoor and outdoor use, AlumLEDs is ideal for many applications including the amusement, recreation, and architectural industries. AlumLEDs is excellent for cove lighting, undercabinet lighting, accent lighting, and many more applications.

AlumLEDs is used in:

- Restaurants
- Casinos
- Retail Stores/Shopping Malls
- Hotels
- Homes and many more

**Electrical**

AlumLEDs is available in 120 Volts or 277 Volts. Remote drivers included. Add "DM" after watts per foot for dimming (8W/DM). Consult factory for dimming protocols to verify compatibility with dimming controls.

Date:		Specifier:		Project:	
-------	--	------------	--	----------	--