


Drawing # ALS300B-F2

Manufactured in U.S.A.

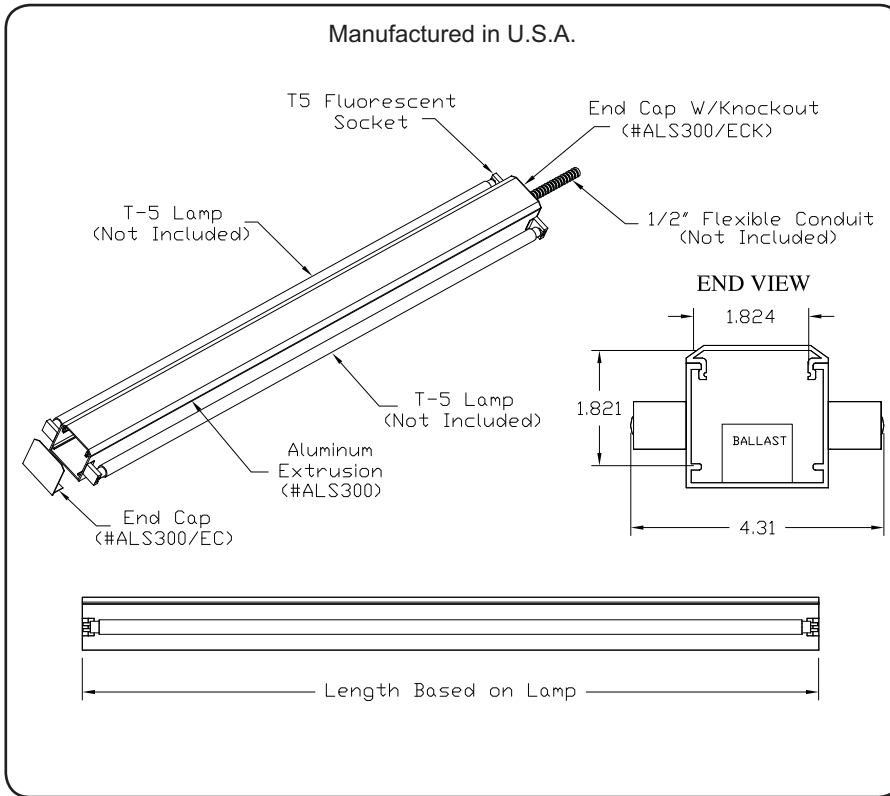

<b>Fixture Type</b>	
---------------------	--

### Product Features

- Applications:** Cove, Indirect Lighting
- Mounting:** Standard  
Straight Runs
- Voltage:** 120V/277
- Lamp Type:** T5 - Linear Fluorescent  
(Lamps Not Included)
- Socket Type:** Miniature G5
- Length:** Built to Order
- Construction:** Aluminum Extrusion
- Light Output:** Refer to IES Files
- Listing:** Dry and Damp Location
- Ballast:** Integral Ballast
- Reflectors:** Optional

### Lamp Specifications

Lamp #	Watts	Socket	Pins	Standard Length	Lamp #	Watts	Socket	Pins	Standard Length
13W	13	G5	2 Pin	22"	24HO	24HO	G5	2 Pin	23"
14W	14	G5	2 Pin	23"	39HO	39HO	G5	2 Pin	35"
21W	21	G5	2 Pin	35"	54HO	54HO	G5	2 Pin	47"
28W	28	G5	2 Pin	47"	80HO	80HO	G5	2 Pin	58"
35W	35	G5	2 Pin	58"					

**Applications**

Designed for indoor use, AlumLite is ideal for many applications including the amusement, recreation, and architectural industries. AlumLite is excellent for cove lighting, undercabinet lighting, accent lighting, and many more applications.

AlumLite is used in:

- Restaurants
- Casinos
- Retail Stores/Shopping Malls
- Hotels
- Homes and many more

**Electrical**

AlumLite Linear Fluorescent Series is supplied with an integral 120V or 277V ballast. Consult factory for other voltages.

**Lamps**

Linear Fluorescent Lamps are not included with the fixture.

**Material**

Aluminum Extrusion available in natural aluminum, anodizing, or powder coating.

### How to Order or Specify

**Product Code: (Fill in the Blanks)**

\_\_\_\_ / \_\_\_\_ / \_\_\_\_ / **SP** / \_\_\_\_

Ex.: ALS300B-F2	13W	WH	SP	120V
Series	Lamp	Finish	SP	Voltage
ALS300B-F2	13W	Natural Aluminum (NA)	Straight Pieces (SP)	120V
ALS300B-F2	14W	Satin (SA)		277V
	21W	White (WH)		Specify for other Voltages
	28W	Anodized Black (AB)		
	35W	Anodized Chrome (AC)		
	24HO	Powder Coat (PC)		
	39HO			
	54HO			
	80HO			

Date:		Specifier:		Project:	
-------	--	------------	--	----------	--



2034 E. Lincoln Ave. # 431 • Anaheim, CA 92806  
 TF: 800.921.CALI (2254) • PH: 714-535-7900 • FX: 714.535.7902  
 Web site: www.calilighting.com • E-mail: info@calilighting.com

