


Drawing # ALS300B-RLR

Manufactured in U.S.A.

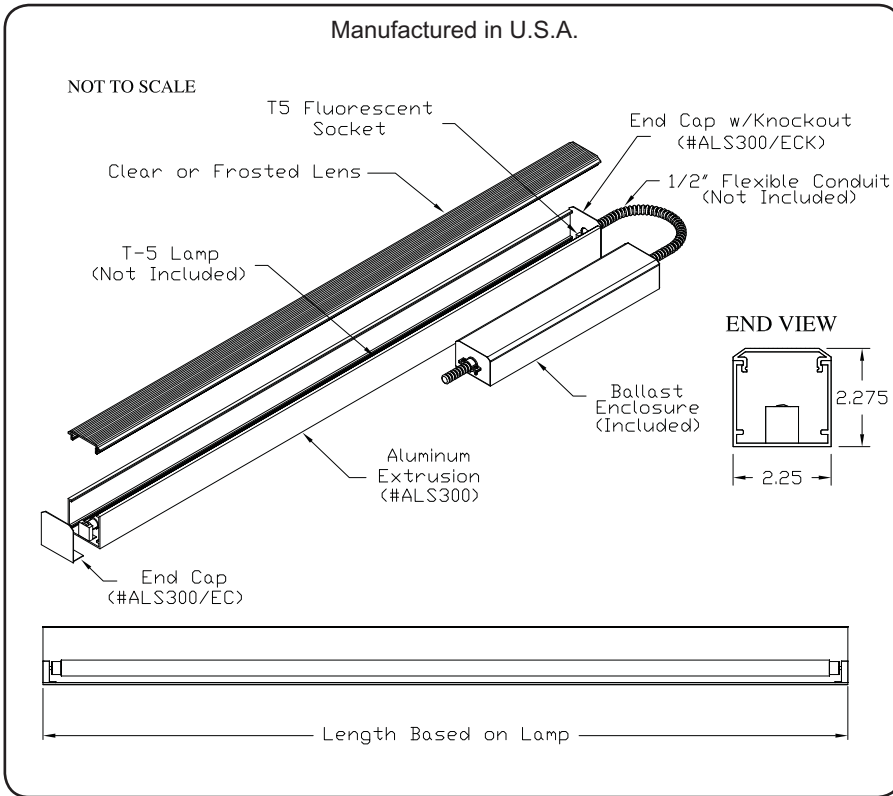

Fixture Type	
---------------------	--

Product Features

- Applications:** Cove, Indirect Lighting
- Mounting:** Standard
Straight Runs
- Voltage:** 120V/277
- Lamp Type:** T5 - Linear Fluorescent (Lamps Not Included)
- Socket Type:** Miniature G5
- Length:** Built to Order
- Construction:** Aluminum Extrusion
- Light Output:** Refer to IES Files
- Listing:** Dry or Wet Location
- Ballast:** Remote Ballast
- Reflectors:** Optional

Lamp Specifications

Lamp #	Watts	Socket	Pins	Standard Length
13W	13	G5	2 Pin	22"
14W	14	G5	2 Pin	23"
21W	21	G5	2 Pin	35"
28W	28	G5	2 Pin	47"
35W	35	G5	2 Pin	58"

Lamp #	Watts	Socket	Pins	Standard Length
24HO	24HO	G5	2 Pin	23"
39HO	39HO	G5	2 Pin	35"
54HO	54HO	G5	2 Pin	47"
80HO	80HO	G5	2 Pin	58"

How to Order or Specify

Product Code: (Fill in the Blanks)

____ / ____ / ____ / **SP** / ____ / ____

Ex.: ALS300B-RLR	13W	WH	SP	120V	D
Series	Lamp	Finish	SP	Voltage	Dry or Wet
ALS300B-RLR	13W	Natural Aluminum (NA)	Straight Pieces (SP)	120V	Dry (D)
ALS300B-RLR/F	14W	Satin (SA)		277V	Wet (W)
F = Frosted Lens	21W	White (WH)		Specify for other Voltages	
	28W	Anodized Black (AB)			
	35W	Anodized Chrome (AC)			
	24HO	Powder Coat (PC)			
	39HO				
	54HO				
	80HO				

Applications

Designed for indoor or outdoor use, AlumLite is ideal for many applications including the amusement, recreation, and architectural industries. AlumLite is excellent for cove lighting, undercabinet lighting, accent lighting, and many more applications.

AlumLite is used in:

- Restaurants
- Casinos
- Retail Stores/Shopping Malls
- Hotels
- Homes and many more

Electrical

AlumLite Linear Fluorescent Series is supplied with a remote 120V or 277V ballast. Consult factory for other voltages.

Lamps

Linear Fluorescent Lamps are not included with the fixture.

Material

Aluminum Extrusion available in natural aluminum, anodizing, or powder coating.

Date:		Specifier:		Project:	
-------	--	------------	--	----------	--



2034 E. Lincoln Ave. # 431 • Anaheim, CA 92806
 TF: 800.921.CALI (2254) • PH: 714-535-7900 • FX: 714.535.7902
 Web site: www.calilighting.com • E-mail: info@calilighting.com

