


Drawing # ALS300D-SF

Manufactured in U.S.A.

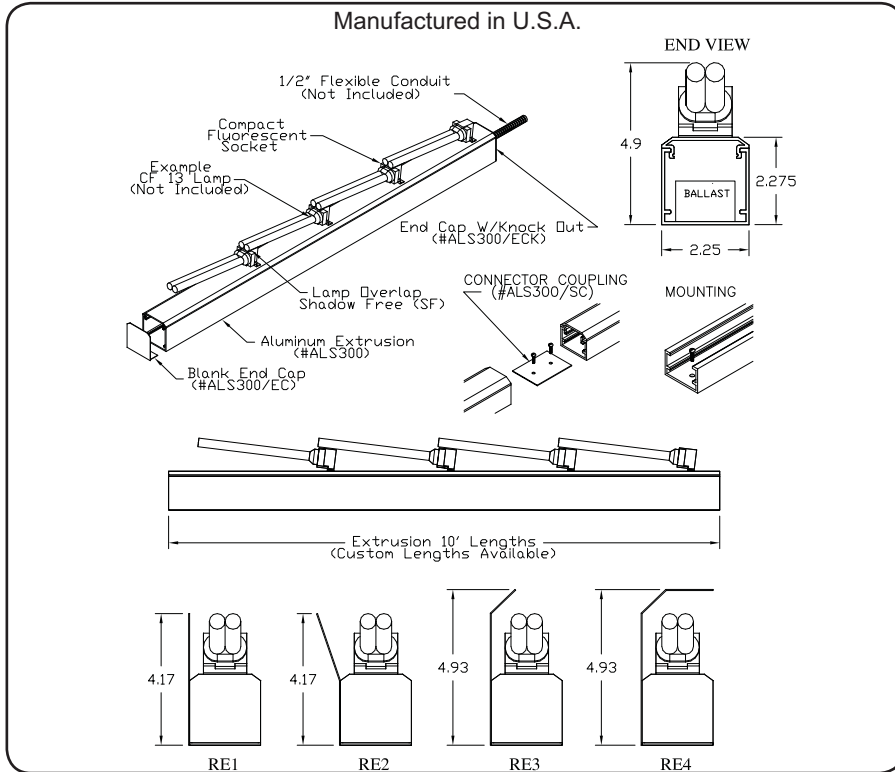

**Fixture Type**

**Product Features**

- Applications:** Cove, Indirect Lighting
- Mounting:** Shadow Free Overlap  
Straight Runs
- Voltage:** 120V/277
- Lamp Type:** Compact Fluorescent  
(Lamps Not Included)
- Socket Type:** G23, GX23, G23-2, 2G7
- Length:** Built to Order
- Construction:** Aluminum Extrusion
- Light Output:** Refer to IES Files
- Ballast:** Integral Ballast
- Listing:** Dry and Damp Location  
Meets UL1598

**Lamp Specifications**

Lamp #	Watts	Socket	Pins	Overlap Spacing	Lamp #	Watts	Socket	Pins	Overlap Spacing
CF5	5	G23	2 Pin	2" O/C	CF13-2	13	GX23-2	2 Pin	5" O/C
CF7	7	G23	2 Pin	3" O/C	CF5-3	5	2G7	4 Pin	2" O/C
CF9	9	G23	2 Pin	4" O/C	CF7-3	7	2G7	4 Pin	3" O/C
CF13	13	GX23	2 Pin	5" O/C	CF9-3	9	2G7	4 Pin	4" O/C
CF9-2	9	G23-2	2 Pin	4" O/C	CF13-3	13	2G7	4 Pin	5" O/C

**How to Order or Specify**

**Product Code: (Fill in the Blanks)**

ALS300D-SF / \_\_\_\_\_ / \_\_\_\_\_ / SP / \_\_\_\_\_ / \_\_\_\_\_

Series	Lamp	Finish	SP	Voltage	Reflectors
Ex.: ALS300D-SF	CF13	WH	SP	120V	
ALS300D-SF	CF5	Natural Aluminum (NA)	Straight Pieces (SP)	120V	RE1
	CF7	Satin (SA)		277V	RE2
	CF9	White (WH)		Specify for other Voltages	RE3
	CF13	Anodized Black (AB)			RE4
	CF9-2	Anodized Chrome (AC)			Leave Blank If
	CF13-2	Powder Coat (PC)			Reflector
	CF-5				Is Not
	CF9-3				Required
	CF13-3				

**Applications**

Designed for indoor use, AlumLite is ideal for many applications including the amusement, recreation, and architectural industries. AlumLite is excellent for cove lighting, undercabinet lighting, accent lighting, and many more applications.

AlumLite is used in:

- Restaurants
- Casinos
- Retail Stores/Shopping Malls
- Hotels
- Homes and many more

**Electrical**

AlumLite Compact Fluorescent Series is supplied with an integral 120V or 277V ballast. Consult factory for other voltages.

**Lamps**

Compact Fluorescent Lamps are not included with the fixture.

**Material**

Aluminum Extrusion available in natural aluminum, anodizing, or powder coating.


Date:		Specifier:		Project:	
-------	--	------------	--	----------	--



2034 E. Lincoln Ave. # 431 • Anaheim, CA 92806  
 TF: 800.921.CALI (2254) • PH: 714-535-7900 • FX: 714.535.7902  
 Web site: www.calilighting.com • E-mail: info@calilighting.com



Drawing # ALS300D-SF

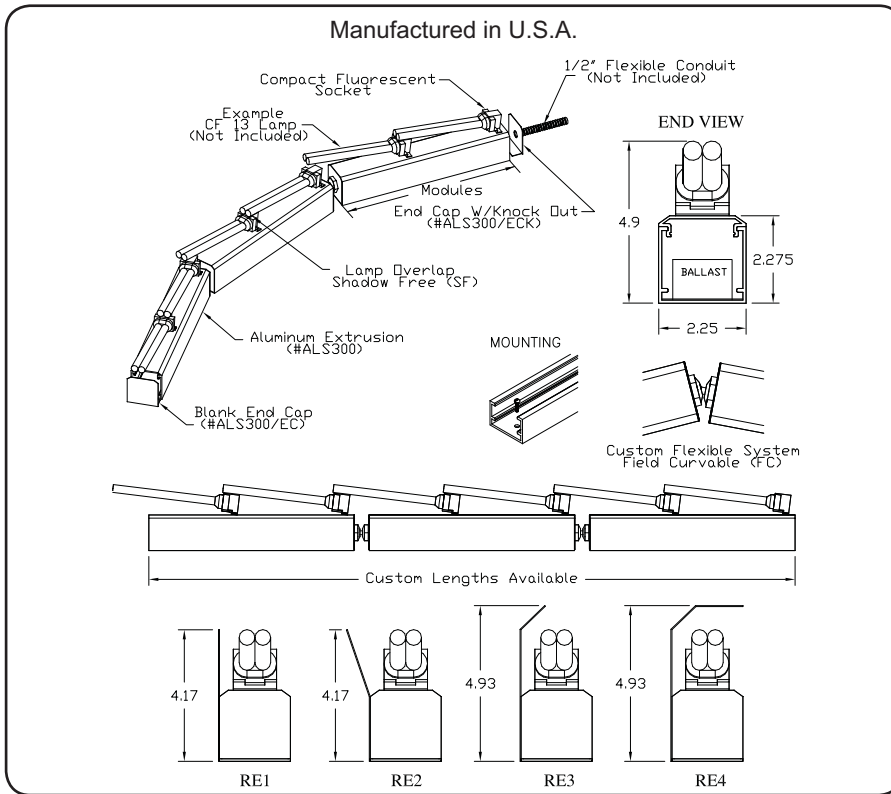

<b>Fixture Type</b>	
---------------------	--

### Product Features

- Applications:** Cove, Indirect Lighting
- Mounting:** Shadow Free Overlap Field Curvable System
- Voltage:** 120V/277
- Lamp Type:** Compact Fluorescent (Lamps Not Included)
- Socket Type:** G23, GX23, G23-2, 2G7
- Length:** Built to Order
- Construction:** Aluminum Extrusion
- Light Output:** Refer to IES Files
- Ballast:** Integral Ballast
- Listing:** Dry and Damp Location Meets UL1598

### Lamp Specifications

Lamp #	Watts	Socket	Pins	Overlap Spacing	Lamp #	Watts	Socket	Pins	Overlap Spacing
CF5	5	G23	2 Pin	2" O/C	CF13-2	13	GX23-2	2 Pin	5" O/C
CF7	7	G23	2 Pin	3" O/C	CF5-3	5	2G7	4 Pin	2" O/C
CF9	9	G23	2 Pin	4" O/C	CF7-3	7	2G7	4 Pin	3" O/C
CF13	13	GX23	2 Pin	5" O/C	CF9-3	9	2G7	4 Pin	4" O/C
CF9-2	9	G23-2	2 Pin	4" O/C	CF13-3	13	2G7	4 Pin	5" O/C

### How to Order or Specify

#### Product Code: (Fill in the Blanks)

ALS300D-SF / \_\_\_\_\_ / \_\_\_\_\_ / FC / \_\_\_\_\_ / \_\_\_\_\_

Ex.: ALS300D-SF	CF13	WH	FC	120V	
Series	Lamp	Finish	FC	Voltage	Reflectors
ALS300D-SF	CF5	Natural Aluminum (NA)	Field Curvable	120V	RE1
	CF7	Satin (SA)	(FC)	277V	RE2
	CF9	White (WH)		Specify	RE3
	CF13	Anodized Black (AB)		for other	RE4
	CF9-2	Anodized Chrome (AC)		Voltages	Leave
	CF13-2	Powder Coat (PC)			Blank If
	CF-5				Reflector
	CF9-3				Is Not
	CF13-3				Required

#### Applications

Designed for indoor use, AlumLite is ideal for many applications including the amusement, recreation, and architectural industries. AlumLite is excellent for cove lighting, undercabinet lighting, accent lighting, and many more applications.

AlumLite is used in:

- Restaurants
- Casinos
- Retail Stores/Shopping Malls
- Hotels
- Homes and many more

#### Electrical

AlumLite Compact Fluorescent Series is supplied with an integral 120V or 277V ballast. Consult factory for other voltages.

#### Lamps

Compact Fluorescent Lamps are not included with the fixture.

#### Material

Aluminum Extrusion available in natural aluminum, anodizing, or powder coating.

Date:	Specifier:	Project:	
-------	------------	----------	--



2034 E. Lincoln Ave. # 431 • Anaheim, CA 92806  
 TF: 800.921.CALI (2254) • PH: 714-535-7900 • FX: 714.535.7902  
 Web site: www.calilighting.com • E-mail: info@calilighting.com

