*lip*LEDs™

Installation Instructions

LLED8200-HC

Overview

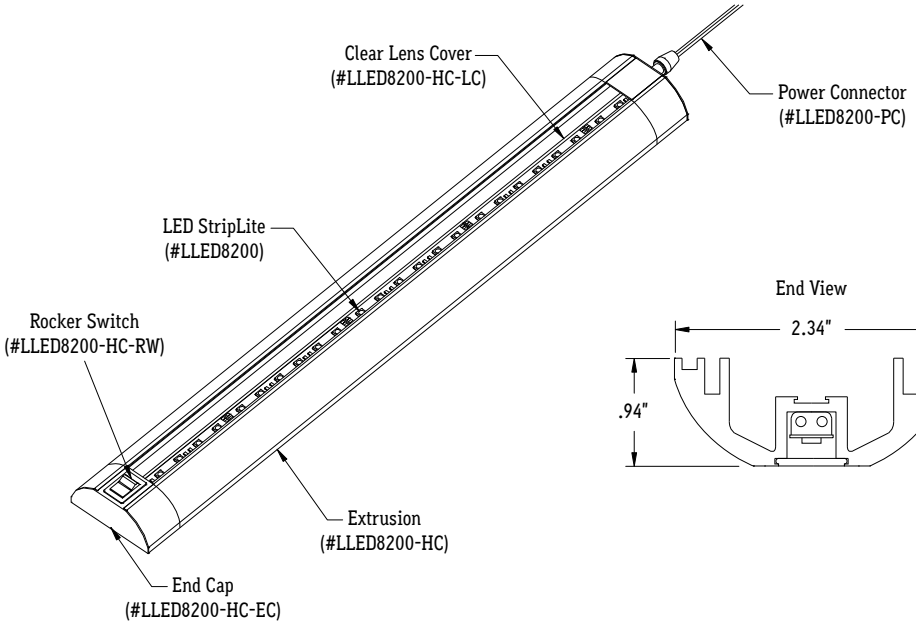

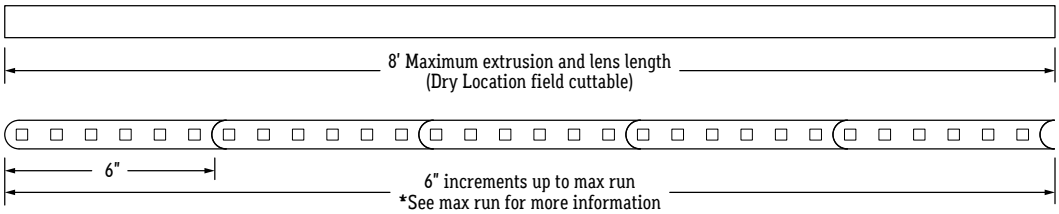

IMPORTANT VERIFY CORRECT LUMINAIRE WAS RECEIVED WITH CORRECT COLOR TEMPERATURE AND VOLTAGE BEFORE CUTTING OR INSTALLING. **CALI** WILL NOT BE RESPONSIBLE IF INCORRECT LUMINAIRE IS INSTALLED.

PRODUCT INFORMATION

- For accent, cove, edge, under cabinet lighting
- 24 volts DC for easy and safe installation
- Long life, energy efficient LEDs
- Maximum run based on 5 Amps:
  20' (6W), 30' (4W), 36' (2W)
  For class II applications:
  14' (6W), 24' (4W), 36' (2W)
- Can be ordered to specific lengths for easier installation when exact dimensions are known (Example: 10x10' 6")
- Plug and light system
- Lead wires are typically 33" long and exit on one end

INSTALLATION RECOMMENDATIONS

- LipLEDs LED tape must be mechanically attached directly to mounting surface using mounting clips or channels
- Conduit raceway should be sleeved at one end for low voltage wires going to *trans*FORMER

ELECTRICAL

- LipLEDs products require a 24 volt DC remote *trans*FORMER
- To calculate transformers size find watts per foot (Example: 2W per foot)
- Determine length in feet (Example: 22.5')
- Calculate Load: Multiply Watts per Foot x Length in Feet (Example: 2W x 22.5'= 45W)
- Choose *trans*FORMER from catalog (Example: TRA50)
- Determine maximum distance using Maximum Wire Length Table (Example: 45 watts is between 40W and 80W. Using #14 wire, maximum distance is 37' from *trans*FORMER to first LED)

INSTALLATION TOOLS REQUIRED

- Electric compound miter saw
- 14.4 to 28 volt cordless drill
- Drill bits - concrete or wood
- Electrical cords
- Safety glasses
- Marker
- Electric hammer drill (optional)
- Phillips bits - sufficient quantity
- Electrical three ways
- Measuring tape
- Chalk line
- Sharp scissors
- Soldering iron with kit

CALIFORNIA ACCENT LIGHTING, INC.
2034 E. Lincoln Ave. #431, Anaheim, CA 92806
ph. 800.921.CALI (2254) or 714.535-7900 \ fx. 714.535.7902
info@calilighting.com \ calilighting.com

© CALI. All rights reserved. CALI reserves the right to make changes or withdraw specifications without prior notice.

lipLEDs™
Installation Instructions

LLED8200-HC
Overview

FEATURES	
APPLICATIONS	Accent, Decorative Lighting
VOLTAGE	24VDC
LAMP TYPE	Modular LEDs
DIMMING	Forward Phase (TRA) 0-10V (TRA-E) Hi-Lume 1% A Series (2 Wire) Hi-Lume 1% (3 Wire)
LENGTH	Built to Order
CONSTRUCTION	LED Modules (Field Cuttable - Dry Location Only)
MOUNTING	Pendant Mount
CRI	>90
EFFICACY	108 Lumens per Watt
VIEWING ANGLE	120 Degrees
L70 LED LIFE	60,000 hrs.
MAXIMUM RUN*	20' (6W), 30' (4W), 36' (2W)
LISTING	Dry Location UL2108, CSA C22.2#9 UL8750, CSA250

*Maximum run is based on 5 Amps: 20' (6W), 30' (4W), 36' (2W)
For class II applications: 14' (6W), 24' (4W), 36' (2W)

WARNING

When using lipLEDs for any application, basic safety precautions should always be followed to reduce the risk of fire, electric shock, and personal injury. lipLEDs must be installed in accordance with the NEC or CEC as applicable. CALI will not be responsible for any damage or malfunction caused by the following:

- Do not exceed maximum length per circuit. Each maximum run requires additional power feed from the transformer
- Do not cover lipLEDs as the covering may cause it to overheat, melt, or ignite.
- Do not install lipLEDs in hazardous locations or closer than 6 inches from any curtain or similar combustible material.
- Do not use lipLEDs if damaged, such as broken outer jacket, loose connections, or frayed wire insulation. Inspect periodically.
- Do not submerge lipLEDs in liquid.
- Do not mount lipLEDs with staples, nails, or like means that might damage the insulation. Mount with double-sided tape and mounting clips.
- Do not install lipLEDs in places where it is subject to continuous flexing.
- Do not mount lipLEDs inside tanks or enclosures of any kind without sufficient ventilation.
- Ground Fault Circuit Interrupter (GFCI) protections are required on circuits or outlets.
- Surge protector must be set up for electrical power system to avoid damaging lipLEDs lighting system.
- Do not install in an environment where excessive heat may exist. Ambient temperature -40°F - 122°F (-20°C - 50°C).
- Only wet location models are intended for outdoors. See package label for environmental details.
- Do not install wet location model in areas where water will collect.
- Do not modify wet location extrusion, end caps, or power connectors.

DIMMING PROTOCOL (Forward Phase Dimming)

Technical Requirements for Control Equipment (Forward Phase Dimming)

- Magnetic Low Voltage (MLV) - Magnetic (core and coil, toroidal) transformer-supplied low voltage lighting.
- Electrical Characteristics - Inductive
- Special Requirements - Symmetric cycles (VDC≤2), smooth turn off (positive and negative periods are equal for safe MLV transformer operation)
- Order transformer with TRA prefix.



Symmetric Forward Phase-Control

Click here for list of magnetic transformers

(TRA) Forward Phase Dimming

DIMMING PROTOCOL (0-10V)

LipLEDs are available in 120 or 277 volts with a dimmable remote driver. The remote driver is available with 0-10V dimming capabilities. The following applies to 0-10V dimming interfaces. *A 0-10v fluorescent dimmer will not dim the LEDs.*

Technical Requirements for Control Equipment (0-10V Protocol)

- The output current level of the dimmable driver is controlled by DC voltage (0-10V) applied to the control terminals (blue and white). The light output of LEDs is controlled by the amount of output current from the dimmable driver.
- The control device must be capable of sinking a DC current flow from the driver. The maximum amount under any condition is 500 microamps (uA) per driver.
- The control terminals of the dimmable driver are isolated from the power lines and are suitable for use as Class 2 wiring. Multiple drivers are desired for use with same control device, the control terminals may be connected in parallel in a bus configuration.
- Since the control bus is Class 2 wiring, all control devices that are connected to the power line must have proper isolation between the power line and the control terminals/bus.
- The control device, which intends to control more than one dimmable driver, must be capable of sinking the total current supplied to control bus by the drivers.
- If the control terminals/bus is shorted in any case, the current on the control terminals/bus will be 500 microamps (uA) per driver maximum.
- If the control terminals are opened, the voltage on the control terminals will then be 10V ± 0.5 volt. As a result, dimmable driver supplies maximum output current to LEDs under this condition.
- The driver is intended for use with control voltages between 0 and 10VDC. The control equipment must not impose a voltage greater than 11 V peak maximum on the driver control terminals.
- Order transformer with TRA-E prefix.

Click here for list of electronic transformers

(TRA-E) 0-10V Dimming

CALI
CALIFORNIA ACCENT LIGHTING, INC.
2034 E. Lincoln Ave. #431, Anaheim, CA 92806
ph. 800.921.CALI (2254) or 714.535-7900 \ fx. 714.535.7902
info@calilighting.com \ calilighting.com
© CALI. All rights reserved. CALI reserves the right to make changes or withdraw specifications without prior notice.

lipLEDs™ LLED8200-HC

Installation Instructions

Product Care

Do not connect lightstrip to power source while spooled or coiled

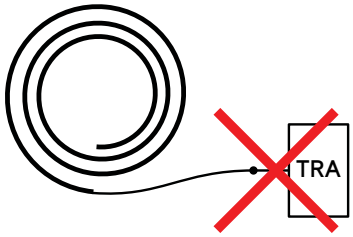

Do not penetrate lightstrip with any foreign object

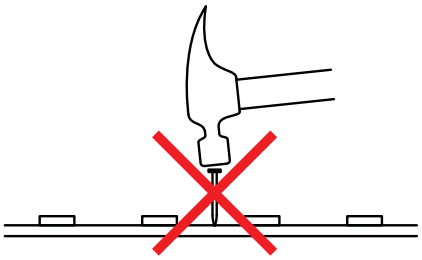

Do not overlap lightstrips at any location



Do not apply excessive pressure to surface of lightstrip or LEDs



Do not overlap extrusions in any way

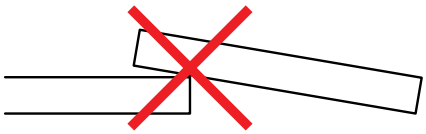

Do not install lightstrip in a zig-zag fashion



Do not cover lightstrip with any material



Do not install connectors without shrink tube for wet location

Do not install wet location in outdoor cove without proper drainage



Do not use a lighter or flame to heat shrink tube



CALIFORNIA ACCENT LIGHTING, INC.
2034 E. Lincoln Ave. #431, Anaheim, CA 92806
ph. 800.921.CALI (2254) or 714.535-7900 \ fx. 714.535.7902
info@calilighting.com \ calilighting.com

© CALI. All rights reserved. CALI reserves the right to make changes or withdraw specifications without prior notice.

LLED8200-HC REQUIRES A TEAM EFFORT TO ENSURE SECURE AND CORRECT INSTALLATION

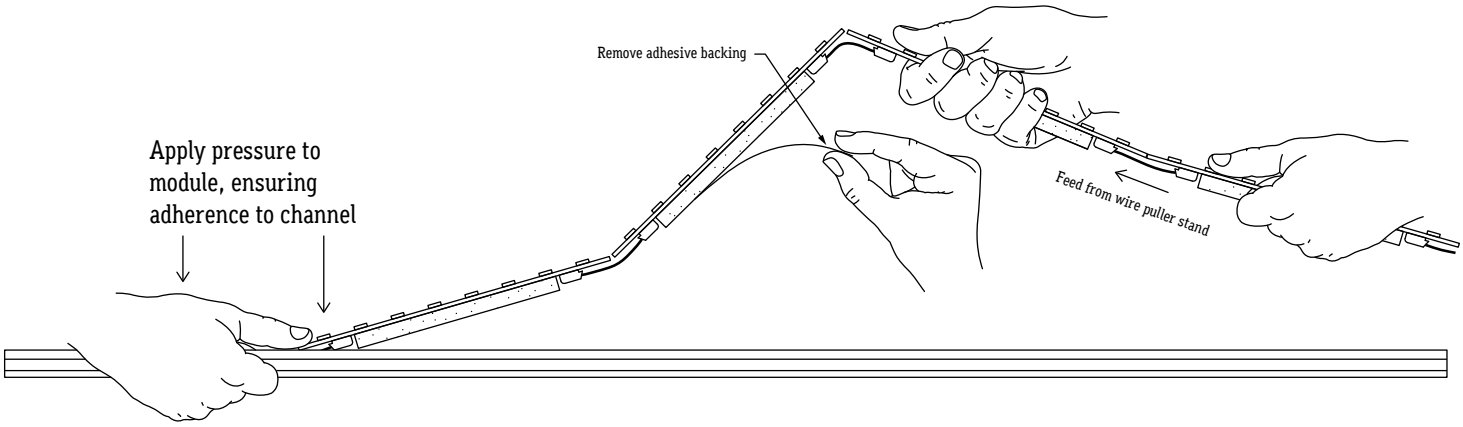

One person on one end removes adhesive backing from double-sided tape, then applies modules to channel

Another person unreels LLED8200 from spool, holding lightstrip at 45° angle

IMPORTANT NOTE TO AVOID COLOR SHIFT:

- Do not paint on or over fixture lens or LEDs. Paint or any other substance on lens or LEDs will cause a shift in color temperature.
- Soffit must be painted evenly with a neutral white to avoid color shift.

CALI
CALIFORNIA ACCENT LIGHTING, INC.
2034 E. Lincoln Ave. #431, Anaheim, CA 92806
ph. 800.921.CALI (2254) or 714.535-7900 \ fx. 714.535.7902
info@calilighting.com \ calilighting.com
© CALI. All rights reserved. CALI reserves the right to make changes or withdraw specifications without prior notice.

*lip*LEDs™ LLED8200-HC

Installation Instructions

Preparing Fixture (Dry Location)

1. Measure area where LLED8200-HC will be installed.

RECOMMENDATION: Use chalk line to ensure a straight installation.



2. Remove adhesive backing from double-sided tape, then apply LLED8200 to channel.

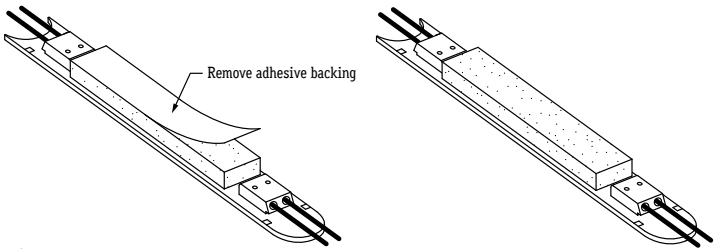

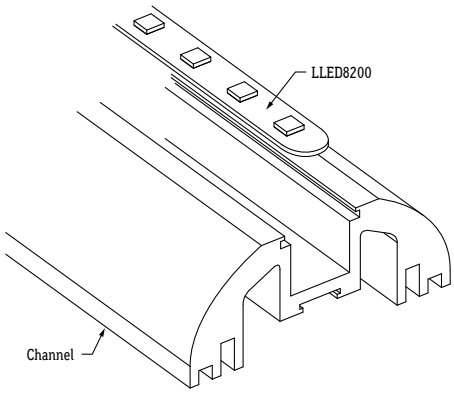

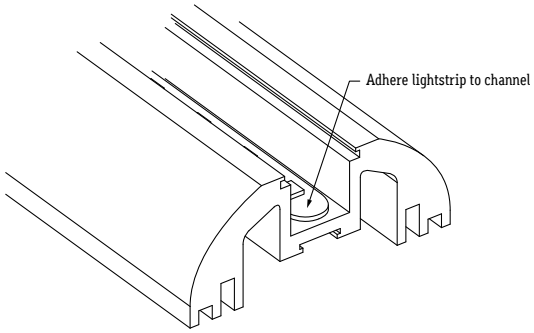

4. Snap lens into channel.

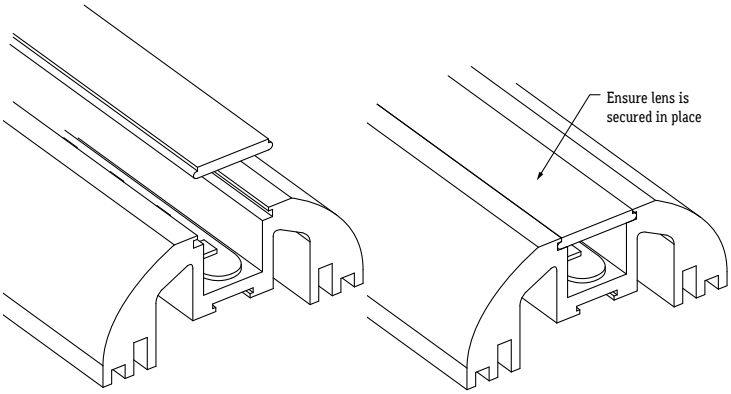

5. Conduct continuity test.

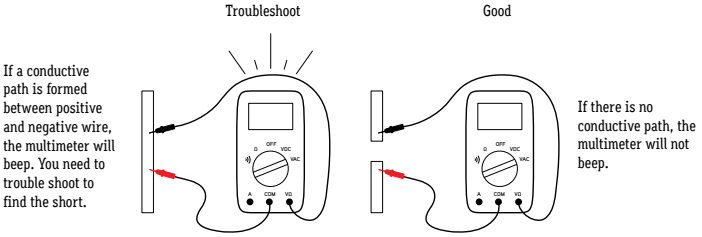

See page 8 for troubleshooting guide

6. Set voltmeter to DC voltage, then test power source before connecting.

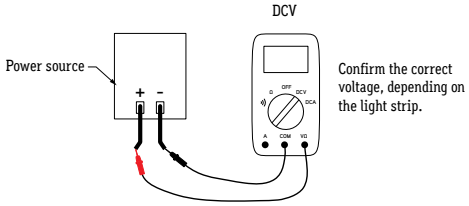

7. Connect power source to power connector. If LEDs do not turn on, flip polarity (+,-) or power source connection to power connector.



CALIFORNIA ACCENT LIGHTING, INC.
2034 E. Lincoln Ave. #431, Anaheim, CA 92806
ph. 800.921.CALI (2254) or 714.535-7900 \ fx. 714.535.7902
info@calilighting.com \ calilighting.com

© CALI. All rights reserved. CALI reserves the right to make changes or withdraw specifications without prior notice.

*lip*LEDs™

Installation Instructions

LLED8200-HC

Hanging Mounting Clip

1. Measure area where LLED8200-HC will be installed.

RECOMMENDATION: Use chalk line to ensure a straight installation.



2. Mark location where mounting clips will be installed.

RECOMMENDATION: Quantity of mounting clips = quantity of fixture +1.
Use a mounting clip at the joint between two fixtures.



3. Mount aircraft cables at locations as marked.

RECOMMENDATION: 3/16" aircraft cable

4. Snap mounting clips into fixture using the same spacing.

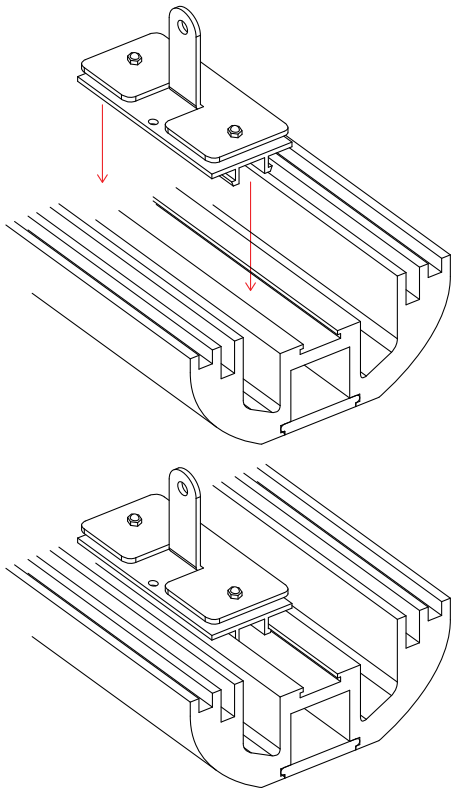

5. Install set screw to prevent mounting clip from sliding.

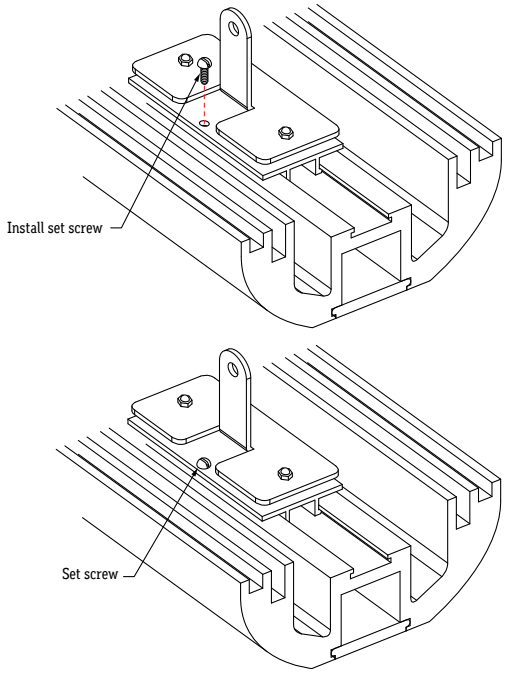

6. Feed cable through loop and secure with a cable lock (not included).

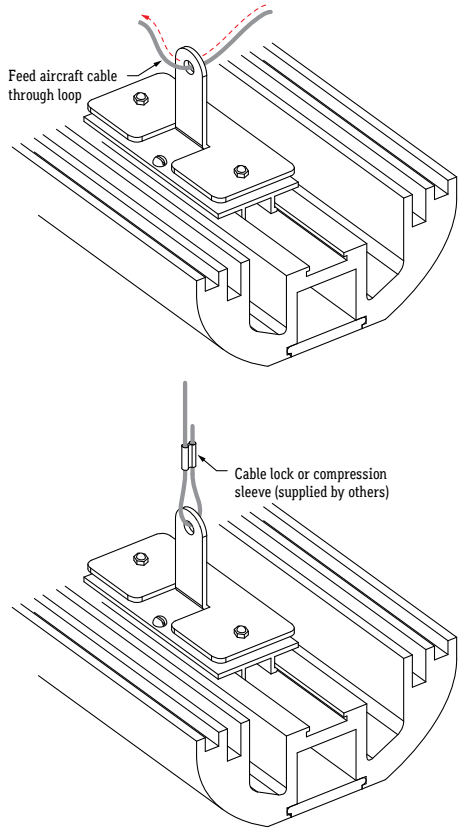

CALIFORNIA ACCENT LIGHTING, INC.
2034 E. Lincoln Ave. #431, Anaheim, CA 92806
ph. 800.921.CALI (2254) or 714.535-7900 \ fx. 714.535.7902
info@calilighting.com \ calilighting.com

© CALI. All rights reserved. CALI reserves the right to make changes or withdraw specifications without prior notice.

lipLEDs™ LLED8200-HC

Installation Instructions

Replacing Modules

1. If applicable, remove lens from extrusion.

2. Remove module and double-sided tape.



3. Size LLED8200 to desired length by removing modules as needed. Insert a pin into each hole on the bottom connectors to release wires.

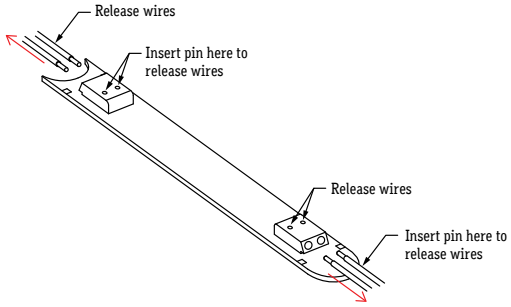

4. Connect 6" modules by inserting wires back into bottom connectors.

NOTE: 2W and 4W boards have + and - indicator markings on the bottom.
6W board has no markings, use the below diagram to determine + and - wires.

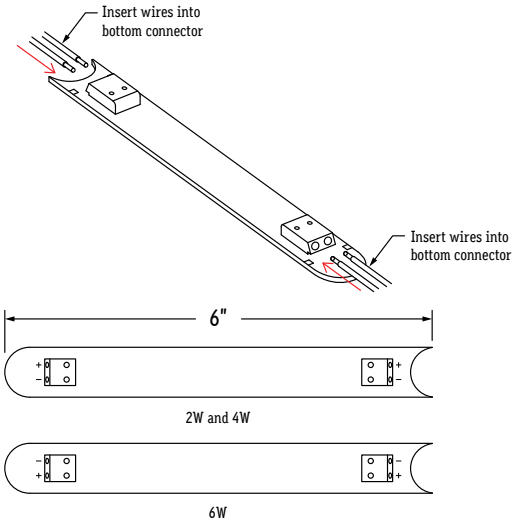

5. Apply new double-sided tape to modules, then apply LLED8200 to channel. Only apply tape underneath modules in between bottom connectors. Do not reuse old tape.

RECOMMENDED TAPE: 3M 4004 Double-Sided Foam Tape - 1/4" x 1/4"

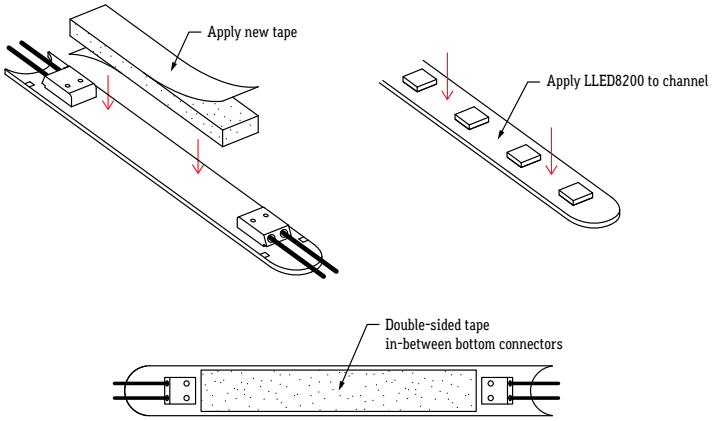

6. Ensure LLED8200 is applied securely to channel.



CALIFORNIA ACCENT LIGHTING, INC.
2034 E. Lincoln Ave. #431, Anaheim, CA 92806
ph. 800.921.CALI (2254) or 714.535-7900 \ fx. 714.535.7902
info@calilighting.com \ calilighting.com

© CALI. All rights reserved. CALI reserves the right to make changes or withdraw specifications without prior notice.

lipLEDs™ LLED8200-HC

Installation Instructions

Troubleshooting

TROUBLESHOOT

- Do not reset breaker multiple times.
- If the unit is overloaded the breaker will trip shutting off the transformer and lights.
- If the breaker reset button has been held down by hand or any type of pressure (example: duct tape), or if the breaker has been reset multiple times without trouble shooting, the unit will:
  - Burn the transformer bobbin
  - Burn the thermal or magnetic breaker
  - Burn the primary or secondary wires due to high amperage caused by overload and/ or short circuit in line which will not allow the breaker to reset
  - Damage the lighting

1. Turn off power before beginning. Check for any damage to the circuit in the LED board. If there is excessive damage and circuit is broken, the board must be replaced.

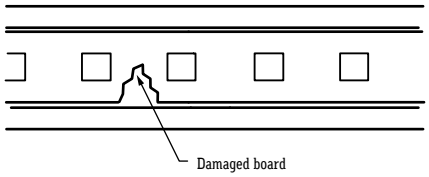

2. Check for metal particles or other foreign objects causing the short.

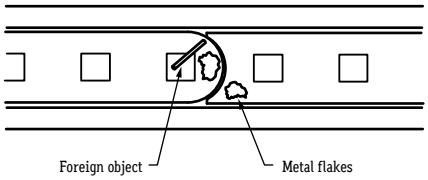

3. Check for broken or improperly cut boards.

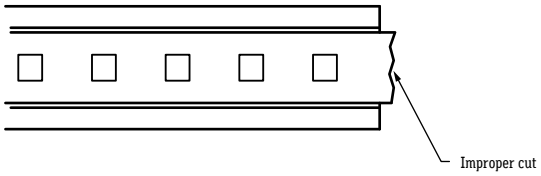

4. Ensure the board are properly aligned and not overlapping

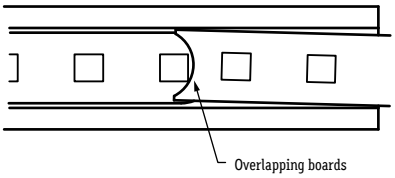

5. Ensure loose wires are not making contact with aluminum extrusion.

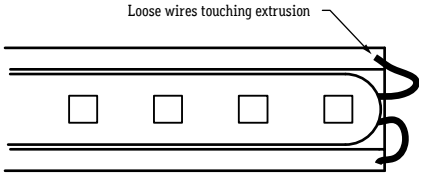

6. Check for water inside end cap and power connector. If water is present, remove water before connecting to power.

7. Do not connect boost tap from transformer voltage. Ensure that voltage does not exceed 24VDC.

8. Conduct continuity test.

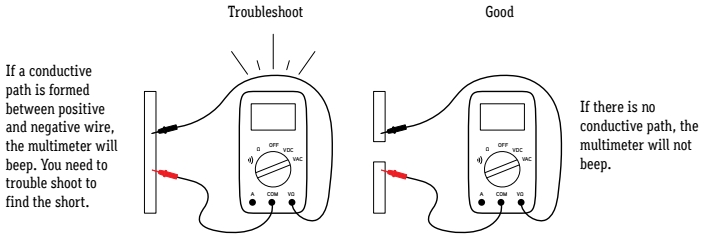

9. Set voltmeter to DC voltage, then test power source before connecting.

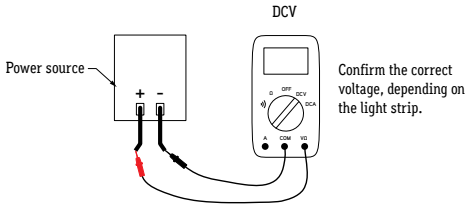

10. Connect power source to power connector. If LEDs do not turn on, flip polarity (+,-) or power source connection to power connector.



CALIFORNIA ACCENT LIGHTING, INC.
2034 E. Lincoln Ave. #431, Anaheim, CA 92806
ph. 800.921.CALI (2254) or 714.535-7900 \ fx. 714.535.7902
info@calilighting.com \ calilighting.com

© CALI. All rights reserved. CALI reserves the right to make changes or withdraw specifications without prior notice.

WATTS (VA) PER CIRCUIT (Maximum wire length to prevent voltage drop)

WIRE SIZE	VOLTAGE	40 VA	80 VA	120 VA	160 VA	200 VA	240 VA	260 VA	280 VA	300 VA	320 VA
14GA	12V	37'	18'	12'	9'	7'	6'	6'	5'	5'	4'
14GA	24V	75'	37'	25'	19'	15'	12'	12'	11'	10'	9'
12GA	12V	59'	29'	20'	15'	12'	9'	9'	8'	8'	7'
12GA	24V	118'	59'	39'	30'	24'	18'	18'	17'	16'	15'
10GA	12V	94'	47'	31'	23'	19'	14'	14'	13'	12'	12'
10GA	24V	188'	94'	63'	47'	38'	29'	29'	27'	25'	24'
8GA	12V	149'	74'	50'	37'	30'	23'	23'	21'	20'	18'
8GA	24V	299'	149'	100'	75'	60'	46'	46'	43'	40'	37'

TRANSFORMER CARE

- Do not submerge transformer in any liquid
- Do not leave any exposed wires
- Do not cover transformer without proper ventilation
- Do not install damaged transformer

MAGNETIC LOW-VOLTAGE DIMMER RATINGS

The stated VA (volt-ampere) rating is the rated capacity of the dimmer which includes the magnetic transformer heat losses and the lamp load. A transformer dissipates less than 20% of the connected load as heat. Added together,the lamp load and the transformer loss determine the dimmer capacity required. See the example below.

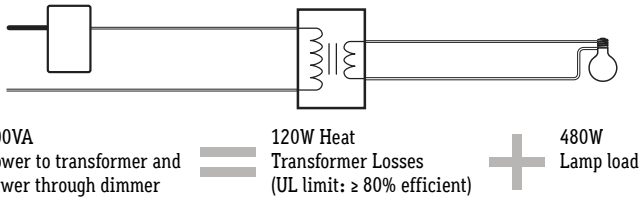

CALIFORNIA ACCENT LIGHTING, INC.
2034 E. Lincoln Ave. #431, Anaheim, CA 92806
ph. 800.921.CALI (2254) or 714.535-7900 \ fx. 714.535.7902
info@calilighting.com \ calilighting.com
© CALI. All rights reserved. CALI reserves the right to make changes or withdraw specifications without prior notice.

CLEANING MATERIALS FOR LENSES AND EXTRUSIONS

The use of solvents and/or cleaners which are not compatible with polycarbonate will result in the softening, crazing, and/or cracking of the plastic part. This is especially true of polycarbonate lamps and mounting bases which may be under stress in their normal applications.

COMPATIBLE WITH POLYCARBONATE:

- Mild soap and water
- Mineral Spirits
- Isobutyl alcohol
- VM and P Naphtha
- Varsol No.2
- Mexane
- Freone TF and TE-35
- Ethanol
- Dirtex
- 2% Sol. Reg. Joy
- 10% Sol Bon Ami
- White Kerosene
- Methyl alcohol
- Heptane
- Petroleum Ether/65 degrees C
- Isopropyl alcohol
- Lacryl PCL-2035 polycarbonate cleaner

NOT COMPATIBLE WITH POLYCARBONATE

- Trichlor
- Gasoline
- ll Liquid Detergents
- Acetone
- Carbon Tetrachloride
- Pink Lux (Phosphate free)
- Triclene
- Chlorinated Hydrocarbons
- #1 & #3 denatured alcohol
- Methyl Ethyl Keytone (MEK)
- Texize-8006, 8129, 8758
- MIBK
- Liquid Cleaner – 8211
- Toluol
- Agitene
- Benzol
- Ajax
- Kleenol Plastics
- Lysol
- Stanisol Naphtha
- Oils
- Lemon Joy (phosphate free)
- Diversol
- Lestoil

CALI
CALIFORNIA ACCENT LIGHTING, INC.
2034 E. Lincoln Ave. #431, Anaheim, CA 92806
ph. 800.921.CALI (2254) or 714.535-7900 \ fx. 714.535.7902
info@calilighting.com \ calilighting.com
© CALI. All rights reserved. CALI reserves the right to make changes or withdraw specifications without prior notice.