


Drawing # FL4000-UCLE

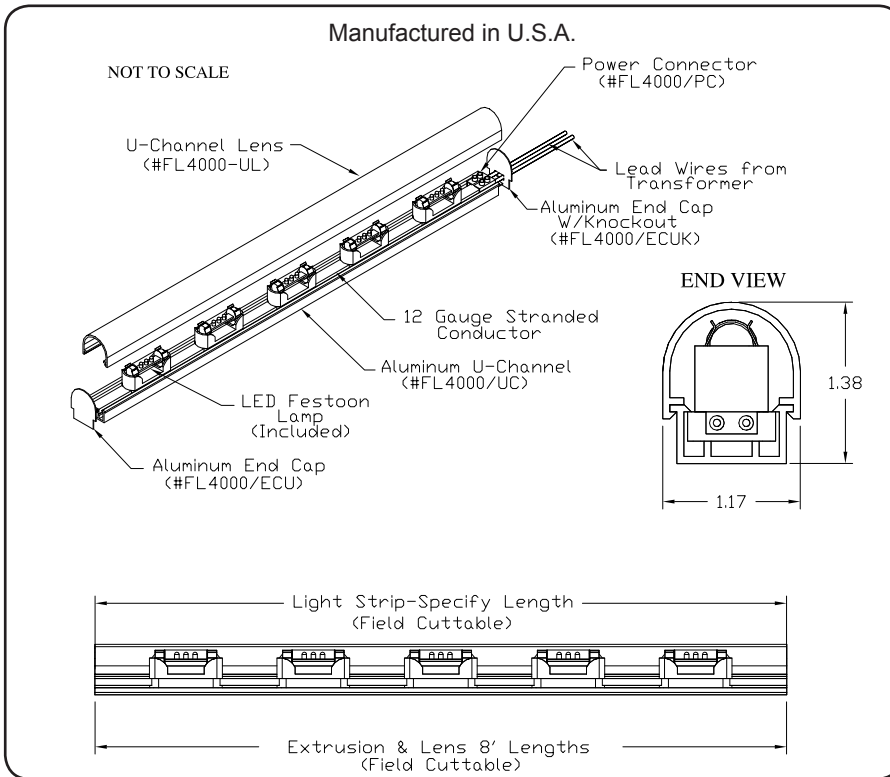

<h2>Fixture Type</h2>	
-----------------------	--

### Product Features

- Applications:** Indoor- Cove, Accent Ltg.
- Voltage:** 12V
- Socket Base:** Festoon
- Length:** Built to Order
- Finish:** Clear
- Feed:** Standard 1' Leads
- Mounting:** U-Channel
- Listing:** Dry or Damp Location
- Options:** Xelogen, Incandescent V-Reflector, Lens X600, X700, X800 Ext.

**Applications**

Designed for indoor use, FestLite is ideal for many applications including the amusement, recreation, and architectural industries. FestLite is excellent for cove lighting, undercabinet lighting, accent lighting, and many more applications.

FestLite is used in:

- Restaurants
- Casinos
- Retail Stores/Shopping Malls
- Hotels
- Homes and many more

**Electrical**

FestLite is available in 12 Volts with LEDs. FestLite is a 20 amp system (12 gauge wire). If using 12 Volt LEDs, a transformer is required. Our standard transformer primary side voltage is 120 Volts. Consult factory for other voltages.

### How to Order or Specify

**Product Code: (Fill in the Blanks)**

FL4000 /      /      /      UC /      LE

Example: FL4000	2"	LED-2.4K	UC	LE
Series	Spacing	Lamp #	Mounting	Lens
FL4000	2" O/C	LED-2.4K	U-Channel (UC)	Lens (LE)
	3" O/C	LED-2.7K		
	4" O/C	LED-3.0K		
	6" O/C	LED-3.5K		
		LED-4.0K		
		LED-4.5K		
		LED-5.0K		
		LED-5.7K		

### LED Specifications

Lamp #	Description	Volts	Viewing Angle	Color Temp.	L70 LED Life Hrs.	Watts	Max. Lamps Per Run	2" O/C	3" O/C	4" O/C	6" O/C
LED-2.4K	2400K Warm White	12	220	2400	50,000	0.75	200	40'	50'	66'	100'
LED-2.7K	2700 Warm White	12	220	2700	50,000	0.75	200	40'	50'	66'	100'
LED-3.0K	3000K Warm White	12	220	3000	50,000	0.75	200	40'	50'	66'	100'
LED-3.5K	3500K Neutral White	12	220	3500	50,000	0.75	200	40'	50'	66'	100'
LED-4.0K	4000K Neutral White	12	220	4000	50,000	0.75	200	40'	50'	66'	100'
LED-4.5K	4500K Neutral White	12	220	4500	50,000	0.75	200	40'	50'	66'	100'
LED-5.0K	5000K Cool White	12	220	5000	50,000	0.75	200	40'	50'	66'	100'
LED-5.7K	5700K Cool White	12	220	5700	50,000	0.75	200	40'	50'	66'	100'



FestLite Series is compliant to California Title-24


Date:	Specifier:	Project:	
-------	------------	----------	--



2034 E. Lincoln Ave. # 431 • Anaheim, CA 92806  
 TF: 800.921.CALI (2254) • PH: 714-535-7900 • FX: 714.535.7902  
 Web site: www.calilighting.com • E-mail: info@calilighting.com



Drawing # FL4000-UCLE

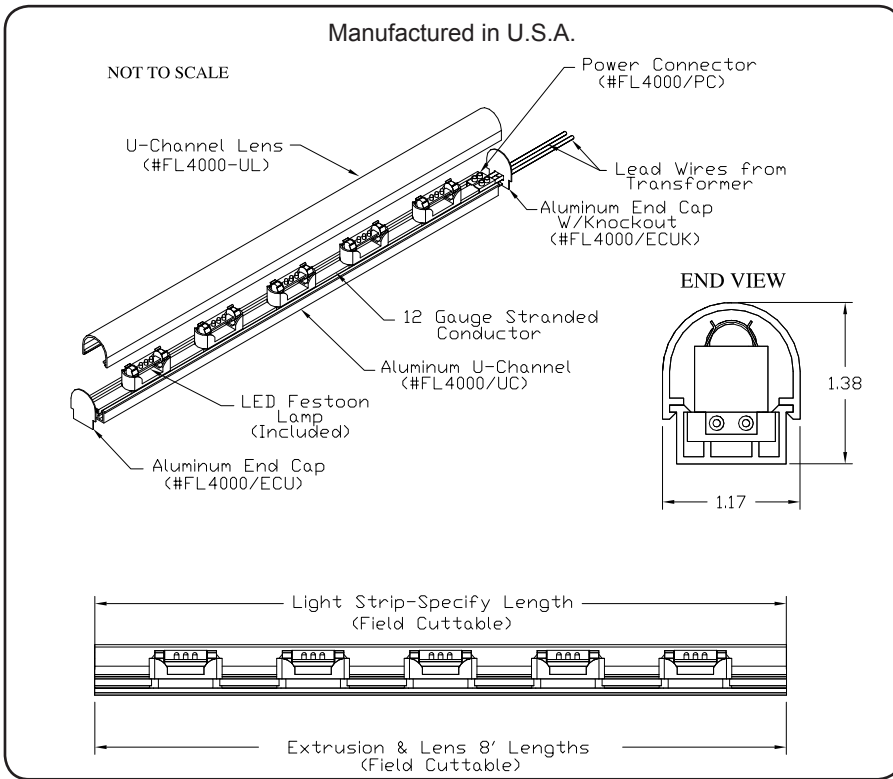

**Fixture Type**

### Product Features

- Applications:** Indoor- Cove, Accent Ltg.
- Voltage:** 12V
- Socket Base:** Festoon
- Length:** Built to Order
- Finish:** Clear
- Feed:** Standard 1' Leads
- Mounting:** U-Channel
- Listing:** Dry or Damp Location
- Options:** Xelogen, Incandescent  
V-Reflector, Lens  
X600, X700, X800 Ext.

### Applications

Designed for indoor use, FestLite is ideal for many applications including the amusement, recreation, and architectural industries. FestLite is excellent for cove lighting, undercabinet lighting, accent lighting, and many more applications.

FestLite is used in:

- Restaurants
- Casinos
- Retail Stores/Shopping Malls
- Hotels
- Homes and many more

### Electrical

FestLite is available in 12 Volts with LEDs. FestLite is a 20 amp system (12 gauge wire). If using 12 Volt LEDs, a transformer is required. Our standard transformer primary side voltage is 120 Volts. Consult factory for other voltages.

## How to Order or Specify

### Product Code: (Fill in the Blanks)

FL4000	/	/	/	UC	/	LE
Example: FL4000	2"	LED-A		UC		LE
Series	Spacing	Lamp #		Mounting		Lens
FL4000	2" O/C	LED-R		U-Channel (UC)		Lens (LE)
	3" O/C	LED-G				
	4" O/C	LED-B				
	6" O/C	LED-A				

## LED Specifications

Lamp #	Description	Volts	Viewing Angle	Color Temp.	L70 LED Life Hrs.	Watts	Max. Lamps Per Run	2" O/C	3" O/C	4" O/C	6" O/C
LED-R	Red LED	12	220		100,000	0.75	200	40'	50'	66'	100'
LED-G	Green LED	12	220		100,000	0.75	200	40'	50'	66'	100'
LED-B	Blue LED	12	220		50,000	0.75	200	40'	50'	66'	100'
LED-A	Amber LED	12	220		100,000	0.75	200	40'	50'	66'	100'



FestLite Series is compliant to California Title-24

Date:		Specifier:		Project:	
-------	--	------------	--	----------	--




V3

2034 E. Lincoln Ave. # 431 • Anaheim, CA 92806  
 TF: 800.921.CALI (2254) • PH: 714-535-7900 • FX: 714.535.7902  
 Web site: www.calilighting.com • E-mail: info@calilighting.com



Drawing # FL4000-UCLE

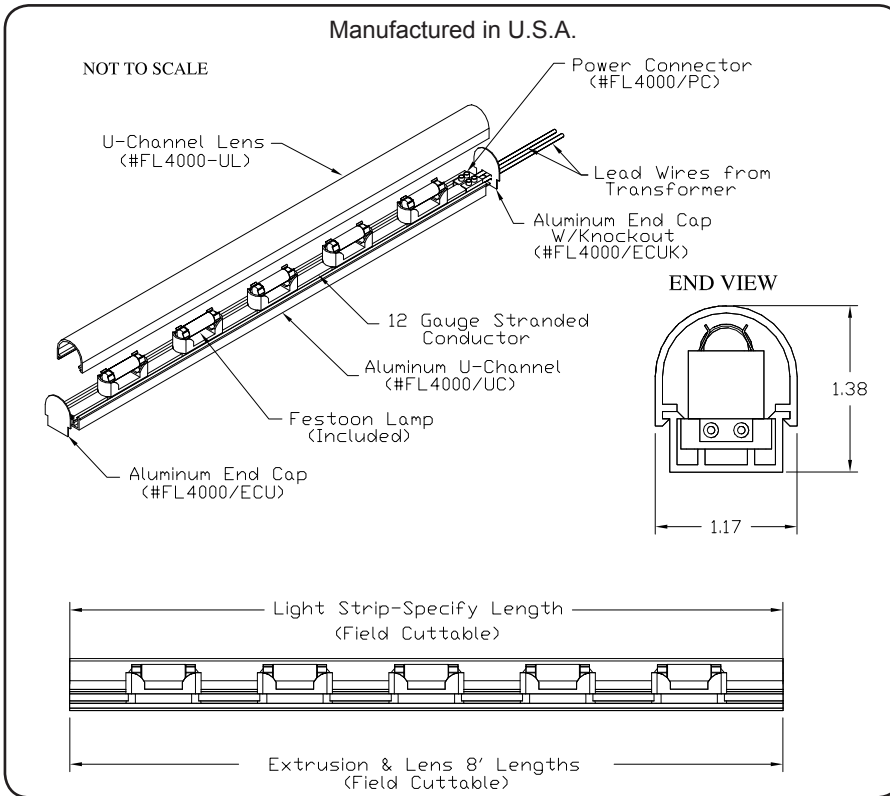

<b>Fixture Type</b>	
---------------------	--

### Product Features

- Applications:** Indoor- Cove, Accent Ltg.
- Voltage:** 24V
- Socket Base:** Festoon
- Length:** Built to Order
- Finish:** Clear
- Feed:** Standard 1' Leads
- Mounting:** U-Channel
- Listing:** Dry or Damp Location
- Options:** LEDs, MR11, MR16  
V-Reflector, Lenses  
X600, X700, X800 Ext.

**Applications**

Designed for indoor use, FestLite is ideal for many applications including the amusement, recreation, and architectural industries. FestLite is excellent for cove lighting, undercabinet lighting, accent lighting, and many more applications.

FestLite is used in:

- Restaurants
- Casinos
- Retail Stores/Shopping Malls
- Hotels
- Homes and many more

**Electrical**

FestLite is available in 12 or 24 Volts. FestLite is a 20 amp system (12 gauge wire). If using 12 or 24 Volt lamps, a transformer is required. Our standard transformer primary side voltage is 120 Volts. Consult factory for other voltages.

### How to Order or Specify

#### Product Code: (Fill in the Blanks)

FL4000	/	/	/	UC	/	LE
Example: FL4000	2"	5WXE	UC	LE		
Series	Spacing	Lamp #	Mounting	Lens		
FL4000	2" O/C	3WIN	U-Channel (UC)	Lens (LE)		
	3" O/C	5WIN				
	4" O/C	10WIN				
	6" O/C	3WXE				
		5WXE				
		10WXE				

- Frosted Lamps Available, Add an F to the Lamp # for frosted lamps. Ex. 3WINF
- 12V Lamps available, consult factory.

### Lamp Specifications

Lamp #	Description	Volts	Lumens	Color Temp.	Lamp Life Hrs.	Watts	Max. Lamps Per Run	2" O/C	3" O/C	4" O/C	6" O/C
3WIN	3 Watt Incandescent	24	20	2450	10,000	3	160	26'	40'	53'	80'
5WIN	5 Watt Incandescent	24	38	2450	15,000	5	144	24'	36'	48'	72'
10WIN	10 Watt Incandescent	24	80	2450	10,000	10	72	12'	18'	24'	36'
3WXE	3 Watt Xelogen	24	30	2800	10,000	3	160	26'	40'	53'	80'
5WXE	5 Watt Xelogen	24	50	2800	15,000	5	144	24'	36'	48'	72'
10WXE	10 Watt Xelogen	24	120	2800	10,000	10	72	12'	18'	24'	36'

Date:		Specifier:		Project:	
-------	--	------------	--	----------	--



2034 E. Lincoln Ave. # 431 • Anaheim, CA 92806  
 TF: 800.921.CALI (2254) • PH: 714-535-7900 • FX: 714.535.7902  
 Web site: www.calilighting.com • E-mail: info@calilighting.com

