


Drawing # RL5100-LPVR

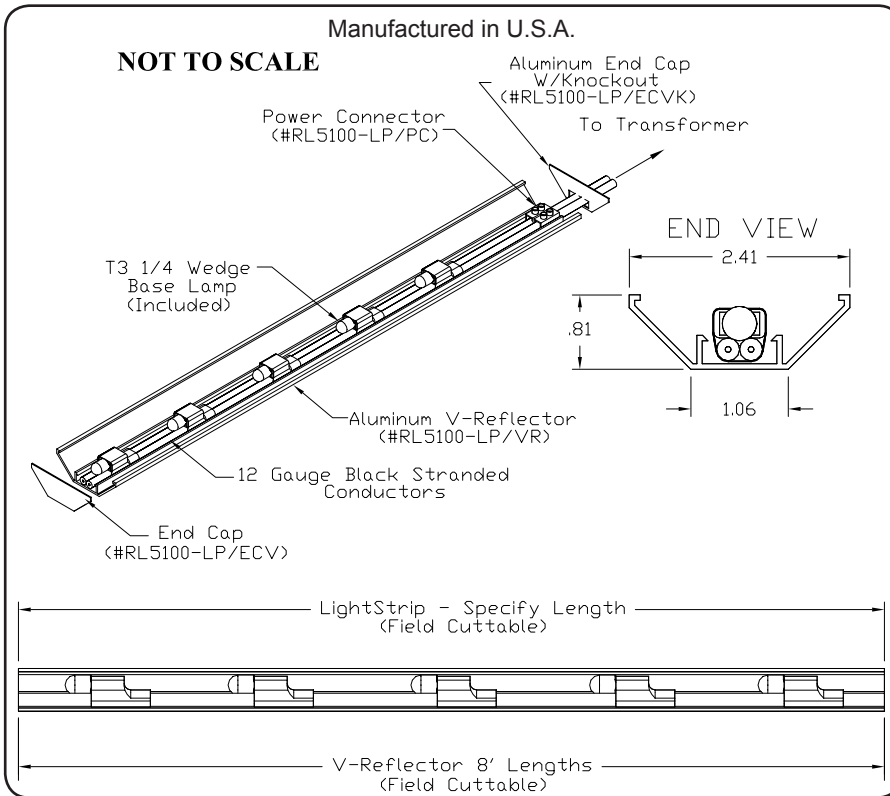

Fixture Type

Product Features

- Applications:** Accent Outdoor Lighting
- Voltage:** 24V
- Socket Base:** Wedge Base
- Length:** Built to Order
- Finish:** Black Wire and Sockets
- Feed:** Standard 6' Leads
- Mounting:** Mounting Clips
- Listing:** Wet Location
- Options:** U-Channel
Mounting Clips

How to Order or Specify

Product Code: (Fill in the Blanks)

RL5100-LP / / / VR / NL

Example: RL5100-LP	2"	5WXE	VR	NL
Series	Spacing	Lamp #	Mounting	Lens
RL5100-LP	2" O/C	4W	V-Reflector (VR)	No Lens (NL)
	3" O/C	5W		
	4" O/C	7W		
	6" O/C	4WF		
	12" O/C	5WF		
		7WF		

• 12V Lamps available, consult factory.

Applications

Designed for indoor or outdoor use, RimLite is ideal for many applications including the amusement, recreation, and architectural industries. RimLite is excellent for cove lighting, undercabinet lighting, accent lighting, outdoors, and many more applications.

RimLite is used in:

- Restaurants
- Casinos
- Retail Stores/Shopping Malls
- Hotels
- Homes and many more

Electrical

RimLite is available in 12 or 24 Volts. RimLite is a 15 amp system (14 gauge wire). A transformer is required for the RimLite System. Our standard transformer primary side voltage is 120 Volts. Consult factory for other voltages.

Lamp Specifications

Lamp #	Description	Volts	Lumens	Color Temp.	Lamp Life Hrs.	Watts	Max. Lamps Per Run	2" O/C	3" O/C	4" O/C	6" O/C	12" O/C
4W	4 Watt Incandescent	24	20	2450	42,000	4	80	13'	20'	26'	40'	80'
5W	5 Watt Xenon	24	38	2450	15,000	5.4	66	11'	16'	22'	33'	66'
7W	7.5 Watt Xenon	24	80	2450	10,000	7.5	48	8'	12'	16'	24'	48'
4WF	4 Watt Incandescent Frosted	24	20	2450	42,000	4	80	13'	20'	26'	40'	80'
5WF	5 Watt Xenon Frosted	24	38	2450	15,000	5.4	66	11'	16'	22'	33'	66'
7WF	7.5 Watt Xenon Frosted	24	80	2450	10,000	7.5	48	8'	12'	16'	24'	48'


Date:		Specifier:		Project:	
-------	--	------------	--	----------	--



2034 E. Lincoln Ave. # 431 • Anaheim, CA 92806
 TF: 800.921.CALI (2254) • PH: 714-535-7900 • FX: 714.535.7902
 Web site: www.calilighting.com • E-mail: info@calilighting.com



Drawing # RL5100-LPVR

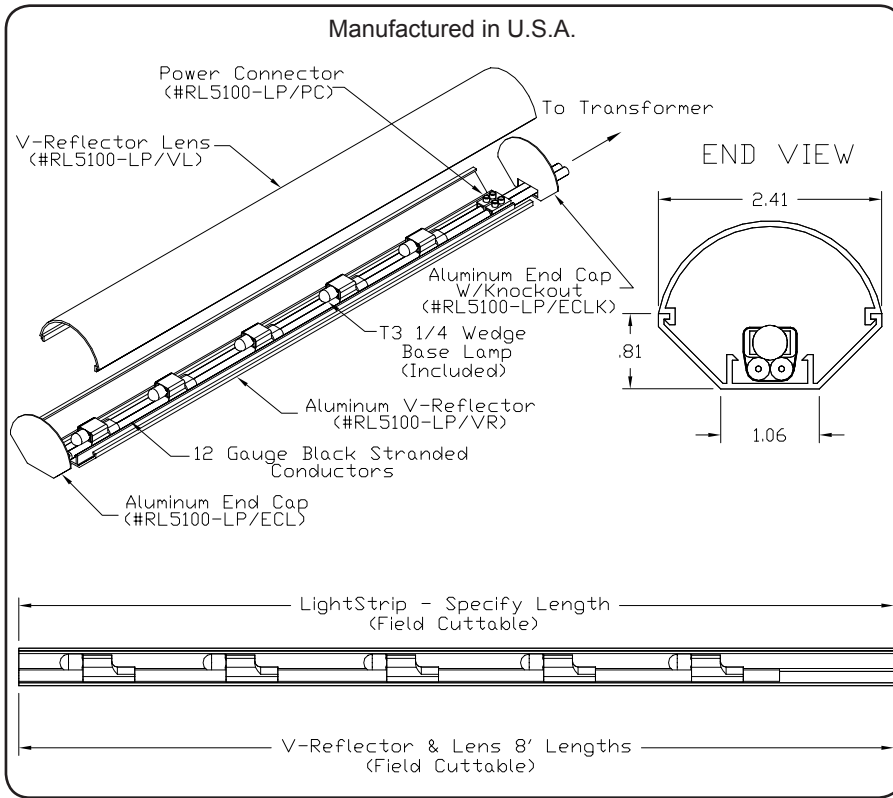

Fixture Type

Product Features

- Applications:** Accent Outdoor Lighting
- Voltage:** 24V
- Socket Base:** Wedge Base
- Length:** Built to Order
- Finish:** Black Wire and Sockets
- Feed:** Standard 6' Leads
- Mounting:** Mounting Clips
- Listing:** Wet Location
- Options:** U-Channel
Mounting Clips

How to Order or Specify

Product Code: (Fill in the Blanks)

RL5100-LP / / / VR /

Example: RL5100-LP	2"	5WXE	VR	VL
Series	Spacing	Lamp #	Mounting	Lens
RL5100-LP	2" O/C	4W	V-Reflector (VR)	Clear Lens (VL)
	3" O/C	5W		Frosted Lens (FVL)
	4" O/C	7W		
	6" O/C	4WF		
	12" O/C	5WF		
		7WF		

• 12V Lamps available, consult factory.

Applications

Designed for indoor or outdoor use, RimLite is ideal for many applications including the amusement, recreation, and architectural industries. RimLite is excellent for cove lighting, undercabinet lighting, accent lighting, outdoors, and many more applications.

RimLite is used in:

- Restaurants
- Casinos
- Retail Stores/Shopping Malls
- Hotels
- Homes and many more

Electrical

RimLite is available in 12 or 24 Volts. RimLite is a 15 amp system (14 gauge wire). A transformer is required for the RimLite System. Our standard transformer primary side voltage is 120 Volts. Consult factory for other voltages.

Lamp Specifications

Lamp #	Description	Volts	Lumens	Color Temp.	Lamp Life Hrs.	Watts	Max. Lamps Per Run	2" O/C	3" O/C	4" O/C	6" O/C	12" O/C
4W	4 Watt Incandescent	24	20	2450	42,000	4	80	13'	20'	26'	40'	80'
5W	5 Watt Xenon	24	38	2450	15,000	5.4	66	11'	16'	22'	33'	66'
7W	7.5 Watt Xenon	24	80	2450	10,000	7.5	48	8'	12'	16'	24'	48'
4WF	4 Watt Incandescent Frosted	24	20	2450	42,000	4	80	13'	20'	26'	40'	80'
5WF	5 Watt Xenon Frosted	24	38	2450	15,000	5.4	66	11'	16'	22'	33'	66'
7WF	7.5 Watt Xenon Frosted	24	80	2450	10,000	7.5	48	8'	12'	16'	24'	48'

Date:	Specifier:	Project:	
-------	------------	----------	--



2034 E. Lincoln Ave. # 431 • Anaheim, CA 92806
 TF: 800.921.CALI (2254) • PH: 714-535-7900 • FX: 714.535.7902
 Web site: www.calilighting.com • E-mail: info@calilighting.com

