


Drawing # RL2

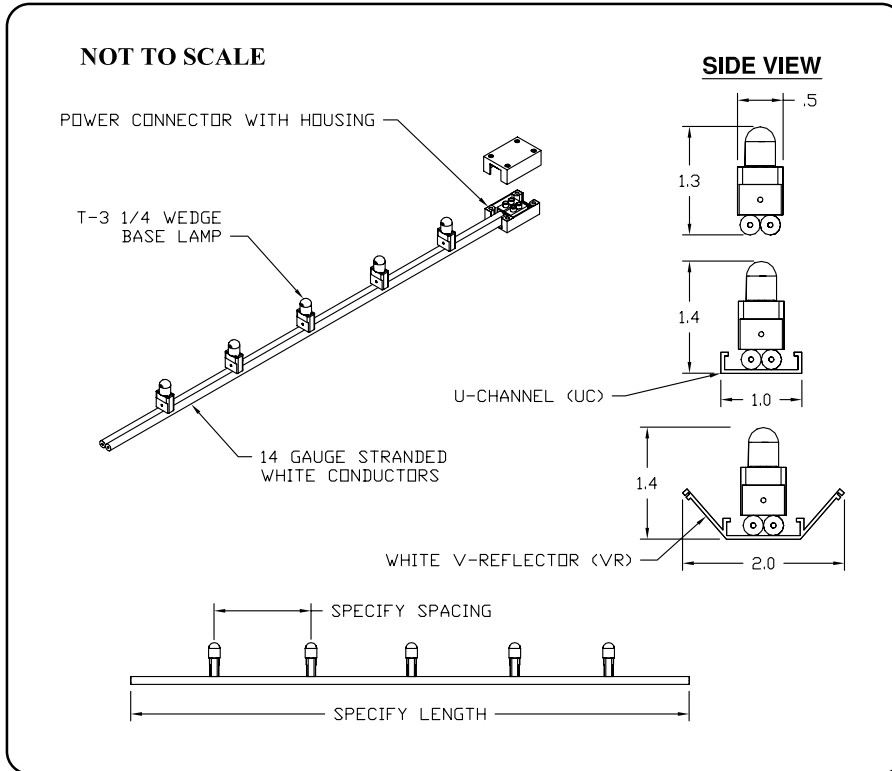

**Product Information**

**Applications:** Accent, Linear, Decorative Lighting  
**Volts:** 24V  
**Lamps:** See Lamp Specifications  
**Lamp Life:** See Lamp Specifications  
**Socket:** White Wedge Base  
**Wire Color:** White 14/2 Wire

**Indoor or Outdoor Applications**

- Amusement Industries**  
Night Clubs, Movie Theatres
- Recreation Industries**  
Hotels, Restaurants, Casinos
- Architectural Industries**  
Interior Decor, Shopping Centers
- Construction Industries**

**Lamp Specifications**

Catalog #	Description	Volts	Watts	Lamp Life Hrs.	Max. Lamps Per Run	2" O/C	3" O/C	4" O/C	6" O/C	12" O/C
1.92W	1.92 Watt Incandescent	24	1.92	67,500	375	62'	93'	125'	187'	375'
4.5W	4.5 Watt Incandescent	24	4.5	42,000	160	26'	40'	53'	80'	160'
5.4W	5.4 Watt Xenon	24	5.4	10,000	133	22'	33'	44'	66'	133'

**Specifier:** \_\_\_\_\_

**Product Code:** Series /Spacing/ Lamp /Volts  
 RL5200 / / / 24V

**Project:** \_\_\_\_\_

**Type:** \_\_\_\_\_

**Date:** \_\_\_\_\_

**Application and Construction**

Designed to utilize incandescent lamps, RimLite 5200 Series provides many desirable features. Of primary importance is the parallel wiring. If one lamp goes out, only that lamp is not working. The rest of the lamps continue working. The long lamp life of incandescent lamps are excellent for the hard to reach places for future lamp replacement. White wire helps give a sophisticated look on the exterior areas.

RimLite has the option of being mounted with easy to install tie wraps. RimLite can be easily field cut for an easy and fast installation not requiring exact field dimensions.

RimLite is excellent to illuminate areas for decorative, rim, accent, linear lighting, etc.

Suggested spacing is 12" for accent lighting on building exteriors. To create a cove like effect with even illumination, 3" or 4" on center is excellent.

**Electrical**

RimLite 5200 a 24 volt system with a 15 amp capacity. RimLite requires a 24V (secondary side) transformer. The standard transformer primary side voltage is 120 volts. Consult factory for other voltages.

**Accessories**

RimLite is available with a U-Channel or V-Reflector for mounting on buildings, etc. For mounting on branches use tie wraps.