


Drawing # RL5200-LPVR

Manufactured in U.S.A.

**NOT TO SCALE**

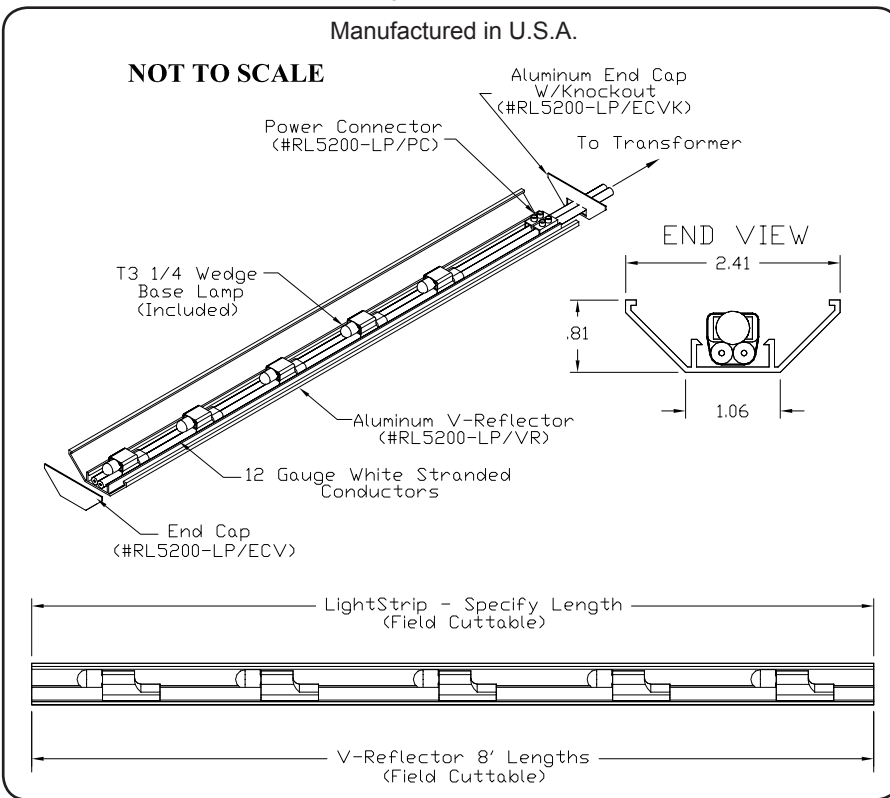

## Fixture Type

### Product Features

- Applications:** Accent Outdoor Lighting
- Voltage:** 24V
- Socket Base:** Wedge Base
- Length:** Built to Order
- Finish:** White Wire and Sockets
- Feed:** Standard 6' Leads
- Mounting:** Mounting Clips
- Listing:** Wet Location
- Options:** U-Channel  
Mounting Clips

### How to Order or Specify

#### Product Code: (Fill in the Blanks)

RL5200	/	/	/	VR	/	NL
Example: RL5200	2"	5WXE	VR	NL		
Series	Spacing	Lamp #	Mounting	Lens		
RL5200	2" O/C	4W	V-Reflector (VR)	No Lens (NL)		
	3" O/C	5W				
	4" O/C	7W				
	6" O/C	4WF				
	12" O/C	5WF				
		7WF				

• 12V Lamps available, consult factory.

### Applications

Designed for outdoor use, RimLite is ideal for many applications including the amusement, recreation, and architectural industries. RimLite is excellent for cove lighting, undercabinet lighting, accent lighting, outdoors, and many more applications.

RimLite is used in:

- Restaurants
- Casinos
- Retail Stores/Shopping Malls
- Hotels
- Homes and many more

### Electrical

RimLite is available in 12 or 24 Volts. RimLite is a 15 amp system (14 gauge wire). A transformer is required for the RimLite System. Our standard transformer primary side voltage is 120 Volts. Consult factory for other voltages.

### Lamp Specifications

Lamp #	Description	Volts	Lumens	Color Temp.	Lamp Life Hrs.	Watts	Max. Lamps Per Run	2" O/C	3" O/C	4" O/C	6" O/C	12" O/C
4W	4 Watt Incandescent	24	20	2450	42,000	4	80	13'	20'	26'	40'	80'
5W	5 Watt Xenon	24	38	2450	15,000	5.4	66	11'	16'	22'	33'	66'
7W	7.5 Watt Xenon	24	80	2450	10,000	7.5	48	8'	12'	16'	24'	48'
4WF	4 Watt Incandescent Frosted	24	20	2450	42,000	4	80	13'	20'	26'	40'	80'
5WF	5 Watt Xenon Frosted	24	38	2450	15,000	5.4	66	11'	16'	22'	33'	66'
7WF	7.5 Watt Xenon Frosted	24	80	2450	10,000	7.5	48	8'	12'	16'	24'	48'


Date:		Specifier:		Project:	
-------	--	------------	--	----------	--



2034 E. Lincoln Ave. # 431 • Anaheim, CA 92806  
 TF: 800.921.CALI (2254) • PH: 714-535-7900 • FX: 714.535.7902  
 Web site: www.calilighting.com • E-mail: info@calilighting.com



Drawing # RL5200-LPVR

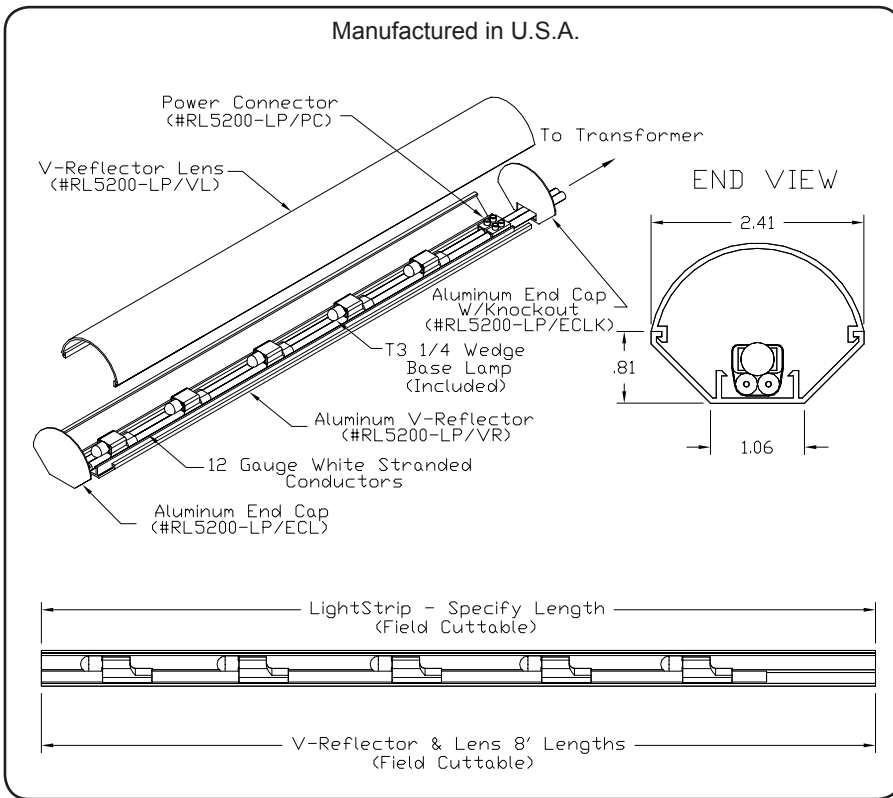

**Fixture Type**

**Product Features**

- Applications:** Accent Outdoor Lighting
- Voltage:** 24V
- Socket Base:** Wedge Base
- Length:** Built to Order
- Finish:** White Wire and Sockets
- Feed:** Standard 6' Leads
- Mounting:** Mounting Clips
- Listing:** Wet Location
- Options:** U-Channel  
Mounting Clips

**How to Order or Specify**

**Product Code: (Fill in the Blanks)**

RL5200-LP	/		/		/	VR	/	
Example: RL5200-LP		2"		5WXE		VR		VL
<b>Series</b>		<b>Spacing</b>		<b>Lamp #</b>		<b>Mounting</b>		<b>Lens</b>
RL5200-LP		2" O/C		4W		V-Reflector (VR)		Clear Lens (VL)
		3" O/C		5W				Frosted Lens (FVL)
		4" O/C		7W				
		6" O/C		4WF				
		12" O/C		5WF				
				7WF				

• 12V Lamps available, consult factory.

**Applications**  
Designed for outdoor use, RimLite is ideal for many applications including the amusement, recreation, and architectural industries. RimLite is excellent for cove lighting, undercabinet lighting, accent lighting, outdoors, and many more applications.

RimLite is used in:

- Restaurants
- Casinos
- Retail Stores/Shopping Malls
- Hotels
- Homes and many more

**Electrical**  
RimLite is available in 12 or 24 Volts. RimLite is a 15 amp system (14 gauge wire). A transformer is required for the RimLite System. Our standard transformer primary side voltage is 120 Volts. Consult factory for other voltages.

**Lamp Specifications**

Lamp #	Description	Volts	Lumens	Color Temp.	Lamp Life Hrs.	Watts	Max. Lamps Per Run	2" O/C	3" O/C	4" O/C	6" O/C	12" O/C
4W	4 Watt Incandescent	24	20	2450	42,000	4	80	13'	20'	26'	40'	80'
5W	5 Watt Xenon	24	38	2450	15,000	5.4	66	11'	16'	22'	33'	66'
7W	7.5 Watt Xenon	24	80	2450	10,000	7.5	48	8'	12'	16'	24'	48'
4WF	4 Watt Incandescent Frosted	24	20	2450	42,000	4	80	13'	20'	26'	40'	80'
5WF	5 Watt Xenon Frosted	24	38	2450	15,000	5.4	66	11'	16'	22'	33'	66'
7WF	7.5 Watt Xenon Frosted	24	80	2450	10,000	7.5	48	8'	12'	16'	24'	48'

Date:		Specifier:		Project:	
-------	--	------------	--	----------	--



2034 E. Lincoln Ave. # 431 • Anaheim, CA 92806  
 TF: 800.921.CALI (2254) • PH: 714-535-7900 • FX: 714.535.7902  
 Web site: www.calilighting.com • E-mail: info@calilighting.com

