


Drawing # RL5600

Manufactured in U.S.A.

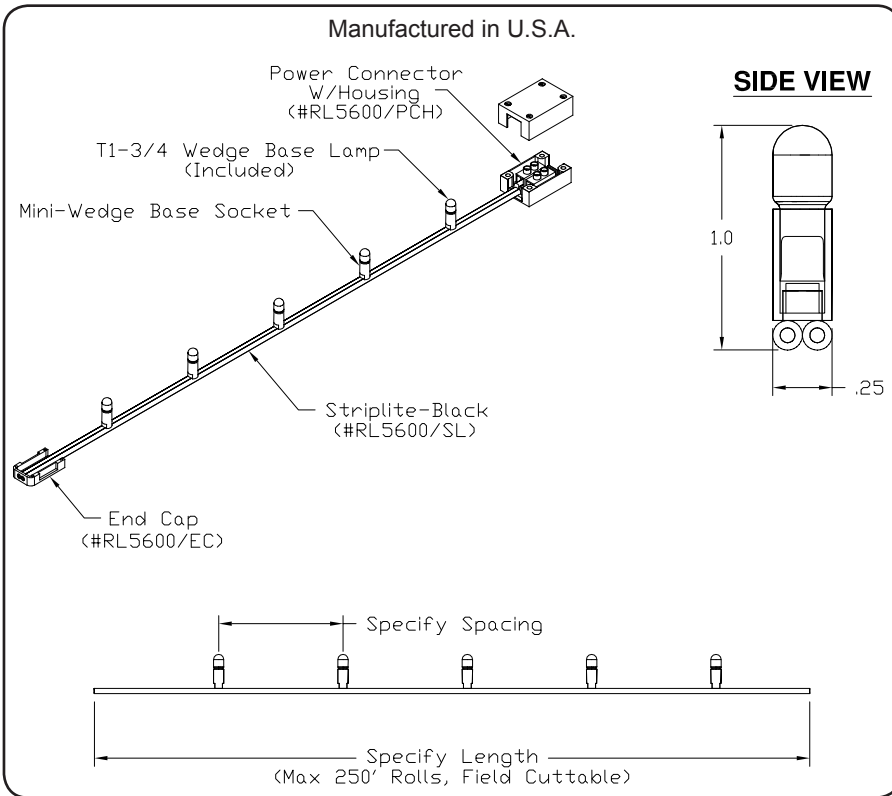

Fixture Type

Product Features

- Applications:** Accent Outdoor Lighting
- Voltage:** 24V
- Socket Base:** Mini-Wedge Base
- Length:** Built to Order
- Finish:** Black Wire and Sockets
- Feed:** Standard 6' Leads
- Mounting:** Mounting Clips
- Listing:** Wet Location
- Options:** U-Channel & Lens

How to Order or Specify

Product Code: (Fill in the Blanks)

Example: RL5600	2"	IN-C	MC	NL
Series	Spacing	Lamp #	Mounting	Lens
RL5600	2" O/C	IN-A	Mounting Clips (MC)	No Lens (NL)
	3" O/C	IN-B	U-Channel (UC)	Lens (LE)
	4" O/C	IN-C		
	6" O/C	IN-D		
	12" O/C	IN-E		

Applications

Designed for outdoor use, RimLite is ideal for many applications including the amusement, recreation, and architectural industries. RimLite is excellent for cove lighting, undercabinet lighting, accent lighting, outdoors, and many more applications.

RimLite is used in:

- Restaurants
- Casinos
- Retail Stores/Shopping Malls
- Hotels
- Homes and many more

Electrical

RimLite is available in 12 or 24 Volts. RimLite is a 8 amp system (18 gauge wire). A transformer is required for the RimLite System. Our standard transformer primary side voltage is 120 Volts. Consult factory for other voltages.

Lamp Specifications

Lamp #	Description	Volts	Wedge Base	Color Temp.	Lamp Life Hrs.	Watts	Max. Lamps Per Run	2" O/C	3" O/C	4" O/C	6" O/C	12" O/C
IN-A	0.5 Watt Incandescent	12	Mini	2450	22,500	.5	250	41'	62'	83'	125'	250'
IN-B	1.0 Watt Incandescent	12	Mini	2450	67,500	1.0	125	20'	31'	41'	62'	125'
IN-C	1.0 Watt Incandescent	24	Mini	2450	112,500	1.0	250	41'	62'	83'	125'	250'
IN-D	1.5 Watt Incandescent	24	Mini	2450	42,500	1.5	160	26'	40'	53'	80'	160'
IN-E	2.5 Watt Incandescent	24	Mini	2450	42,500	2.5	96	16'	24'	32'	48'	96'

Date:		Specifier:		Project:	
-------	--	------------	--	----------	--



2034 E. Lincoln Ave. # 431 • Anaheim, CA 92806
 TF: 800.921.CALI (2254) • PH: 714-535-7900 • FX: 714.535.7902
 Web site: www.calilighting.com • E-mail: info@calilighting.com

