


Drawing # TL1700

Manufactured in U.S.A.

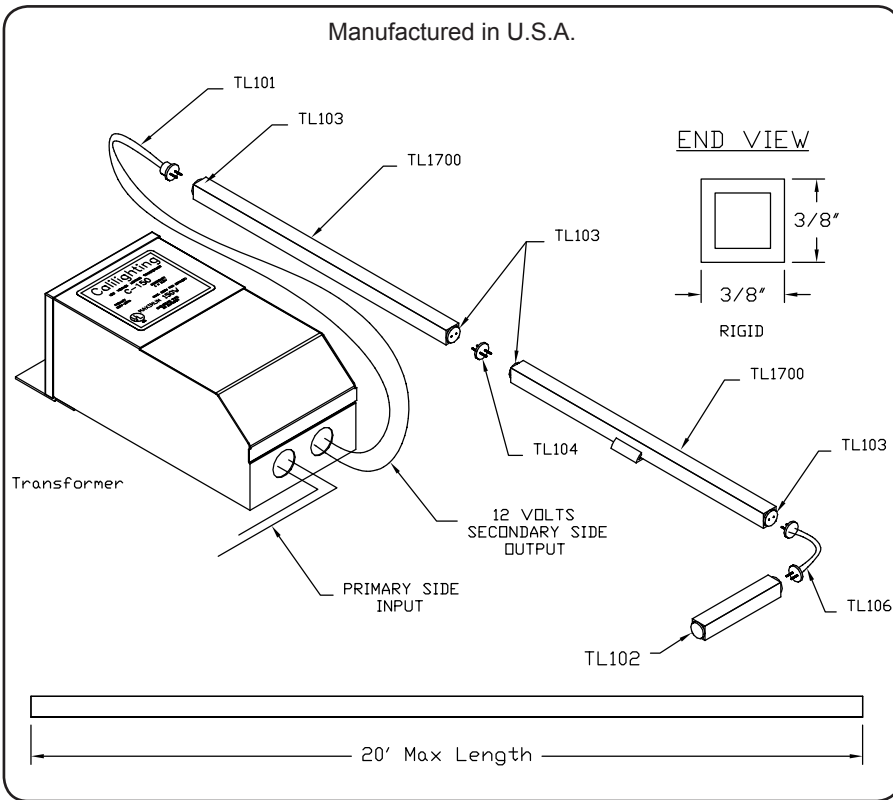

Fixture Type

Product Features

- Applications:** Accent Lighting
- Voltage:** 12V
- Lamp Type:** LEDs or Incandescent
- Socket:** Custom
- Length:** Built to Order
- Construction:** Polycarbonate Tube
- Wiring:** Parallel
- Flame Rating:** UL94-V2; UV Stabilized
- Listing:** Dry or Wet Location

Applications

Designed for indoor or outdoor use, TubeLite Series is ideal for many applications including the amusement, recreation, and architectural industries. TubeLite is excellent for path lighting, accent lighting, and many more applications.

TubeLite is used in:

- Restaurants
- Casinos
- Retail Stores/Shopping Malls
- Hotels
- Movie Theatres and many more

Electrical

TubeLite is a 12 Volt system. TubeLite requires a 12V (secondary side) transformer. The standard primary side voltage on our transformers is 120V. Consult factory for other primary side voltages (example: 277V). A thermal breaker box can be used for secondary protection. See Transformer Brochure.

How to Order or Specify

Product Code: (Fill in the Blanks)

TL1700 / _____ / _____ / _____ / _____ / _____

Ex: TL1700	12"	LED-3.0K	CL	SC	PF-EC
Series	Spacing	Lamp	Lens	Circuit	End Preps
TL1700	1.5" O/C	LED-3.0K	Clear (CL)	Single (SC)	TL101-TL102 (PF-EC)
	2" O/C	LED-5.0K		Chase (CC)	TL101-TL103 (PF-FE)
	3" O/C	LED-R			TL101-TL101 (PF-PF)
	4" O/C	LED-G			TL105-TL102 (CF-EC)
	6" O/C	LED-B			TL105-TL103 (CF-FE)
	8" O/C	LED-A			TL103-TL103 (FE-FE)
	12" O/C	IN-A			
		IN-B			

Lamp Specifications

Lamp #	Description	Lamp Life	Watts	Max. Lamps	1.5" O/C	2" O/C	3" O/C	4" O/C	6" O/C	8" O/C	12" O/C
LED-3.0K	Warm White LED 3000K	50,000 hrs.	.25	192	24'	32'	48'	64'	96'	128'	192'
LED-5.0K	Cool White LED 5000K	50,000 hrs.	.25	192	24'	32'	48'	64'	96'	128'	192'
LED-A	Amber LED	100,000 hrs.	.25	192	24'	32'	48'	64'	96'	128'	192'
LED-R	Red LED	100,000 hrs.	.25	192	24'	32'	48'	64'	96'	128'	192'
LED-G	Green LED	100,000 hrs.	.25	192	24'	32'	48'	64'	96'	128'	192'
LED-B	Blue LED	100,000 hrs.	.25	192	24'	32'	48'	64'	96'	128'	192'
IN-A	.50 Watt Incandescent	80,000 hrs.	.50	95	11'	15'	23'	31'	47'	63'	95'
IN-B	.72 Watt Incandescent	90,000 hrs.	.72	66	8'	11'	16'	22'	33'	44'	66'

Date:	Specifier:	Project:	
-------	------------	----------	--



2034 E. Lincoln Ave. # 431 • Anaheim, CA 92806
 TF: 800.921.CALI (2254) • PH: 714-535-7900 • FX: 714.535.7902
 Web site: www.calilighting.com • E-mail: info@calilighting.com



Notes

