





CALIFORNIA  
ACCENT  
LIGHTING  
INC

# LLED8200-UC | INSTALLATION


Perspective View

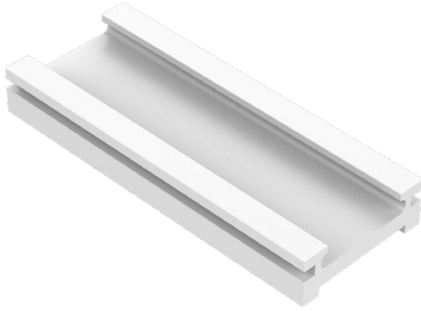


Assembled End View



Dry Location (All Wattages)



Wet Location (2W, 3W, 4W)




Wet Location (6W)


## DRY LOCATION

1. Measure area where luminaire will be installed. Use a chalk line to ensure a straight installation.
2. Lay extrusions along chalk line and drill at least 3 countersink holes per extrusion. Drill additional holes as needed.
3. Screw extrusions to surface using countersink screws.


**Note:** Ensure extrusions are aligned, misalignment will prevent tube from snapping in.

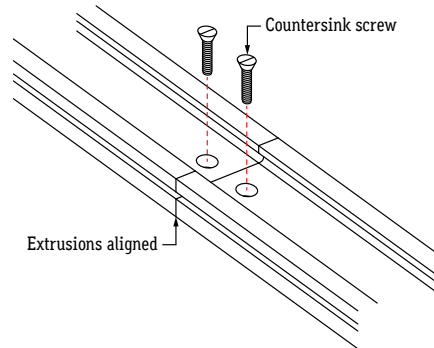


4. Prepare LED boards for mounting by applying double-sided tape to the underside of each board.

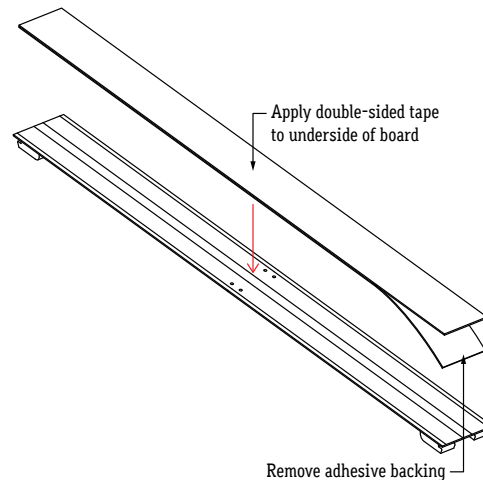

5. After all extrusions have been securely mounted, remove adhesive backing from LED boards and stick in place along extrusion channel, ensuring board is secure inside extrusion.

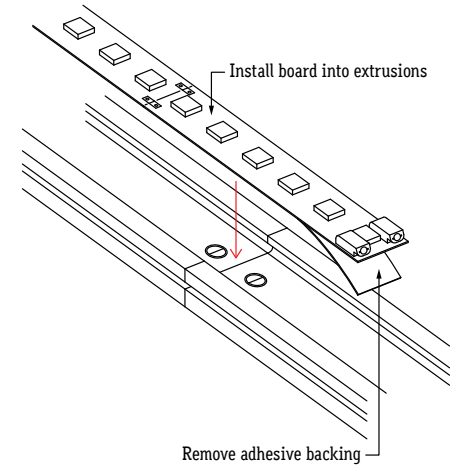

6. Ensure board is secured in place and connections between terminals are secure.

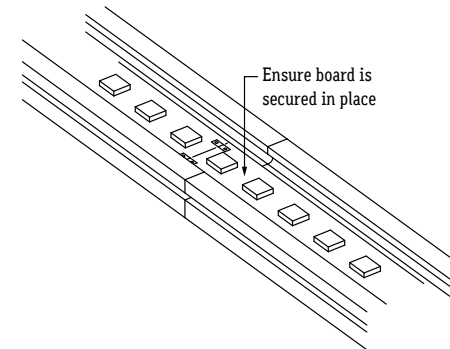

7. If applicable, connect disconnects between fixtures or solder connectors.
8. Perform continuity test before connecting fixture to power source.




CALIFORNIA  
ACCENT  
LIGHTING  
INC

# LLED8200-UC | INSTALLATION


Perspective View




Assembled End View



Dry Location (All Wattages)




Wet Location (2W, 3W, 4W)




Wet Location (6W)

## WET LOCATION


1. Measure area where luminaire will be installed. Use a chalk line to ensure a straight installation.
2. Lay extrusions along chalk line and drill at least 3 countersink holes per extrusion. Drill additional holes as needed.

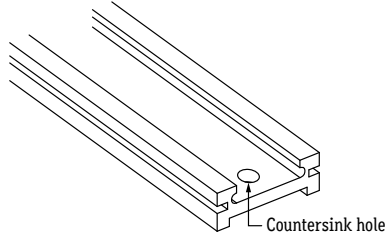


3. Screw extrusions to surface using countersink screws.  
**Note:** Ensure extrusions are aligned. Misalignment will prevent tube from snapping in.

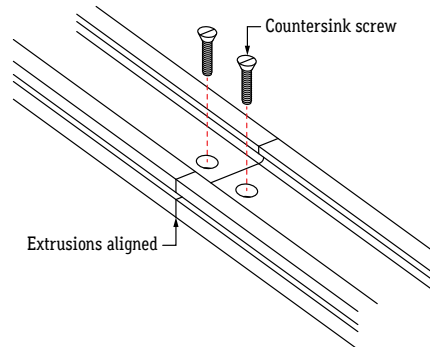

4. Install tube into extrusions, overlapping where two extrusions meet. Plan your cuts so that the tube will always overlap where two extrusions meet. Overlapping tubes helps keep extrusions aligned and prevents light leaks.

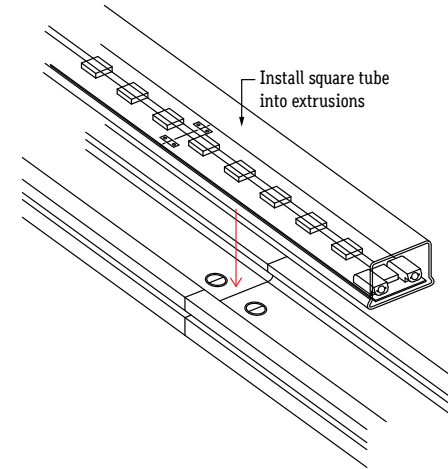

5. Ensure tube is secured in place.

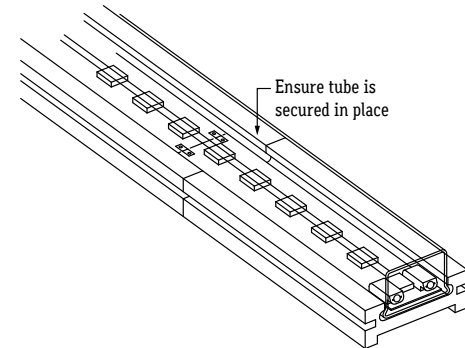

6. If applicable, make connections between fixtures using wet location connectors.
7. Perform continuity test before connecting fixture to power source.