





CALIFORNIA
ACCENT
LIGHTING
INC

LLED9150-F-MC | INSTALLATION


Perspective View



Assembled End View

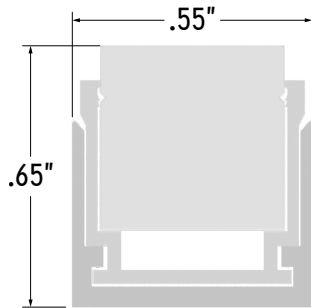


1. Measure area where fixtures will be installed. Use a chalk line to ensure a straight installation.
2. Use 1 mounting clip per 4', rounded up. Use a minimum of 2 mounting clips per fixture.
Note: For outward, downward, or vertical applications, use 1 mounting clip per 2'.
3. Prepare mounting clips for mounting by removing inner clip.




4. Lay mounting clips and pre-drill using proper drill bit for surface and screw size.
Recommendation: 8/32 x 1" countersink screw.
Note: Allow 0.25" clearance for lateral expansion of assembled mounting clips.
Only install mounting clips on flat, even surfaces.

5. Screw outer clips to surface, then replace inner clips.

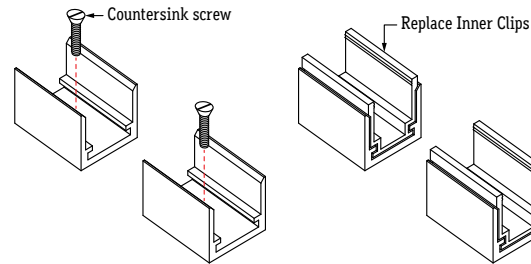

6. Press assembled fixture into mounting clips after all clips have been securely mounted.

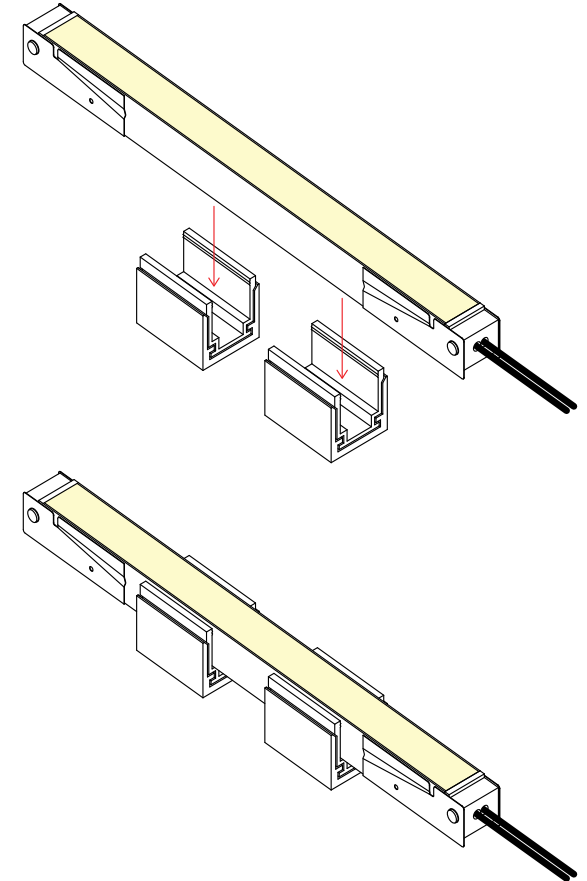

7. If applicable, connect disconnects between fixtures.

8. Perform continuity test before connecting fixtures to power source.