


FEATURES

APPLICATIONS	Accent, Decorative Lighting
VOLTAGE	24VDC
LAMP TYPE	LEDs
DIMMING	Forward Phase (TRA) 0-10V (TRA-E) Hi-Lume 1% (2 Wire) Hi-Lume 1% (3 Wire)
LENGTH	Built to Order
MOUNTING	Mounting Channel
CRI	> 90
EFFICACY	95 Lumens per Watt
VIEWING ANGLE	120 Degrees
L70 LED LIFE	60,000 hrs.
MAXIMUM RUN* (Based on 5 amps)	18' (13W) 21' (11W) 26' (9W) 33' (7.2W) 36' (3W, 5W)
LISTING	Dry or Wet Location

ELECTRICAL


lipLEDs is a 24 Volt system. lipLEDs requires a 24VDC (secondary side) transformer. The standard primary side voltage on our transformers is 120V or 277V. Consult factory for other primary side voltages. A thermal breaker box can be used for secondary protection. See Transformer Brochure.

ACCESSORIES (Not Included)

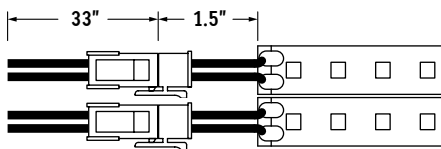

Power Connector
(#LLED8000-PC-2)

Note: Shrink tube included for wet location



Continuous Connector
(#LLED8000-CC-2)


Note: Run lengths required

LED SPECIFICATIONS


LAMP	DESCRIPTION
LED-2.4K	2400K Warm White
LED-2.7K	2700K Warm White
LED-3.0K	3000K Warm White
LED-3.5K	3500K Neutral White
LED-4.0K	4000K Cool White
LED-4.5K	4500K Cool White

Consult factory for cooler white color temperatures. Consult factory for cooler white color temperatures, Red, Green, Blue, and RGB


NOT TO SCALE

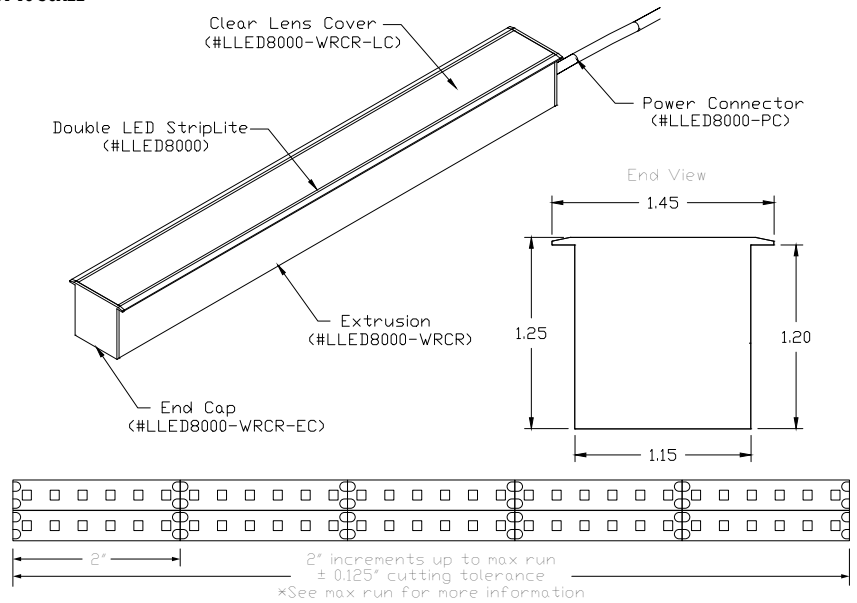


MOUNTING OPTION



Recessed Channel



Spring Loaded Mounting Clip
(#LLED8000-SPR-MC)



HOW TO ORDER OR SPECIFY Product Code: (Fill in the blanks)

LLED8000-WRCR - - - - -						
SERIES	OPTICS	WATTS PER FOOT	DIMMING	LAMP	DRY OR WET	FINISH
Ex. LLED8000-WRCR	F	5W	10V	LED-4.5K	DRY	BK
LLED8000-WRCR	Clear Lens (CL)	3 Watts (3W) (285 Lumens/ft)	Forward Phase (DM)	LED-2.4K	Indoor (DRY)	Natural (NA)
				LED-2.7K		Polished (PA)
	50% Semi-Frost Lens (SF)	5 Watts (5W) (475 Lumens/ft)	0-10V (10V)	LED-3.0K	Outdoor (WET)	White (WH)**
				LED-3.5K		Satin (SA)
	100% Frosted Lens (F)	7.2 Watts (7.2W) (684 Lumens/ft)	Hi-Lume 1% (2 Wire)***	LED-4.0K		Black (BK)
				LED-4.5K		Green (GN)
		9 Watts (9W) (856 Lumens/ft)	Hi-Lume 1% (3 Wire)****			Red (RD)
						Silver (SR)
		11 Watts (11W) (1046 Lumens/ft)	Leave Blank for Non-Dimming			
		13 Watts (13W) (1236 Lumens/ft)				

**** 40 watt max Hi-Lume Lutron #L3DA4U1UKL-CV240

*** 40 watt max Hi-Lume Lutron #L7EA4U1UKL-CV240

** Standard finish - White if left blank

* Maximum run based on 4 amps for class II applications: 14' (13W), 17' (11W), 21' (9W), 26' (7.2W), 36' (3W, 5W)