

# ALS600T

## PRODUCT LAUNCH



---

*Lighting for the Professional Designer*

---


# THE ALL NEW ALS600T

CALI proudly introduces the ALS600T to the *alumLEDs* series. The ALS600T is a new High output luminaire system suitable for wall washing, grazing, and façade lighting in harsh outdoor environments.



ALS600T has a unique 0-10V dimming capability with a 100-1% dim to dark feature. Performing at very high output, the ALS600T has an impressive Color Rendering Index greater than 93.

ALS600T presents innovative features:

- 10°-60° or Asymmetric Optics
- Fixed or Adjustable
- Tempered Glass Lens
- Louvers and Reflectors
- Wide Range of Mounting Options

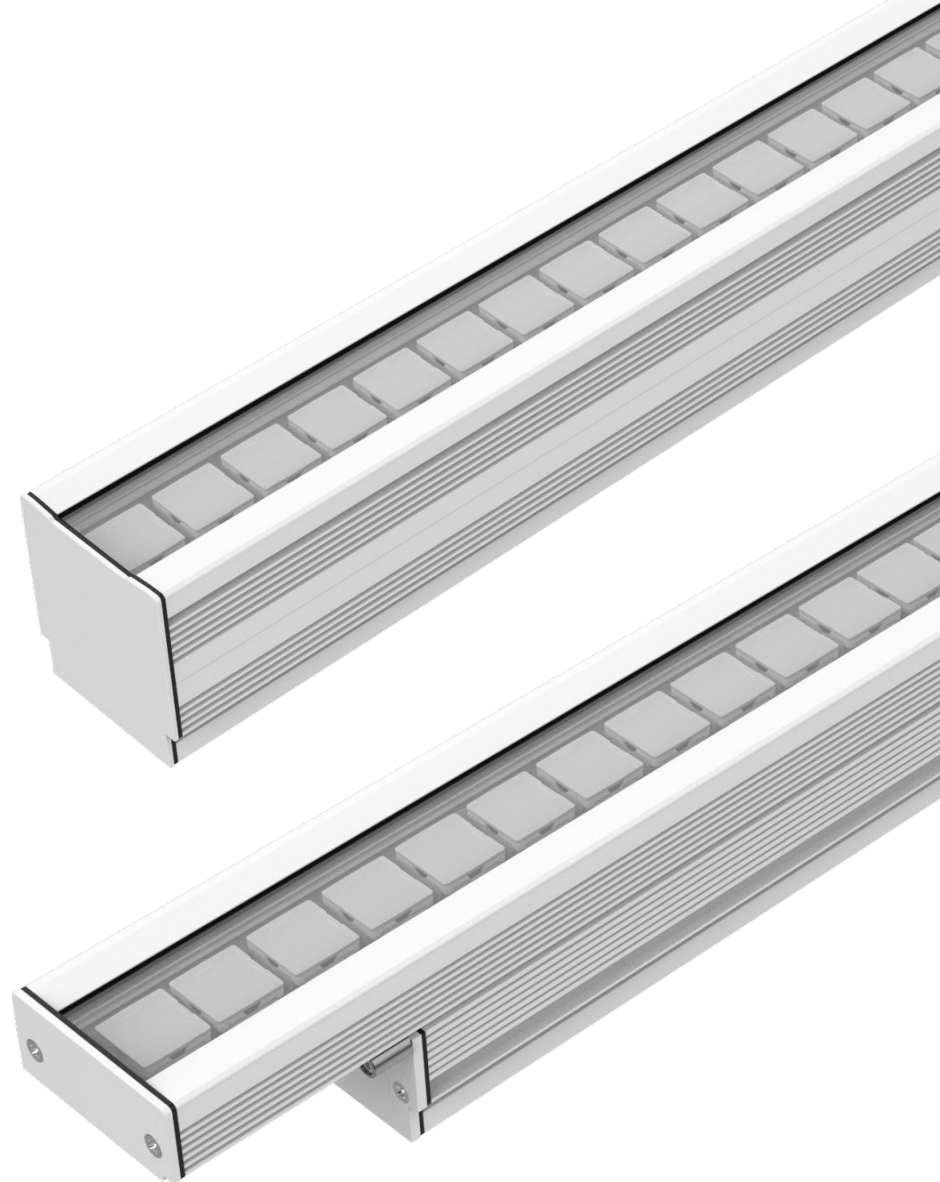

# ADJUSTABLE ILLUMINATION

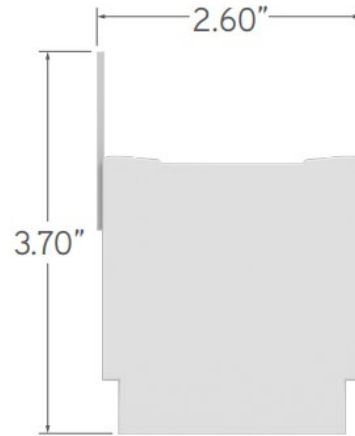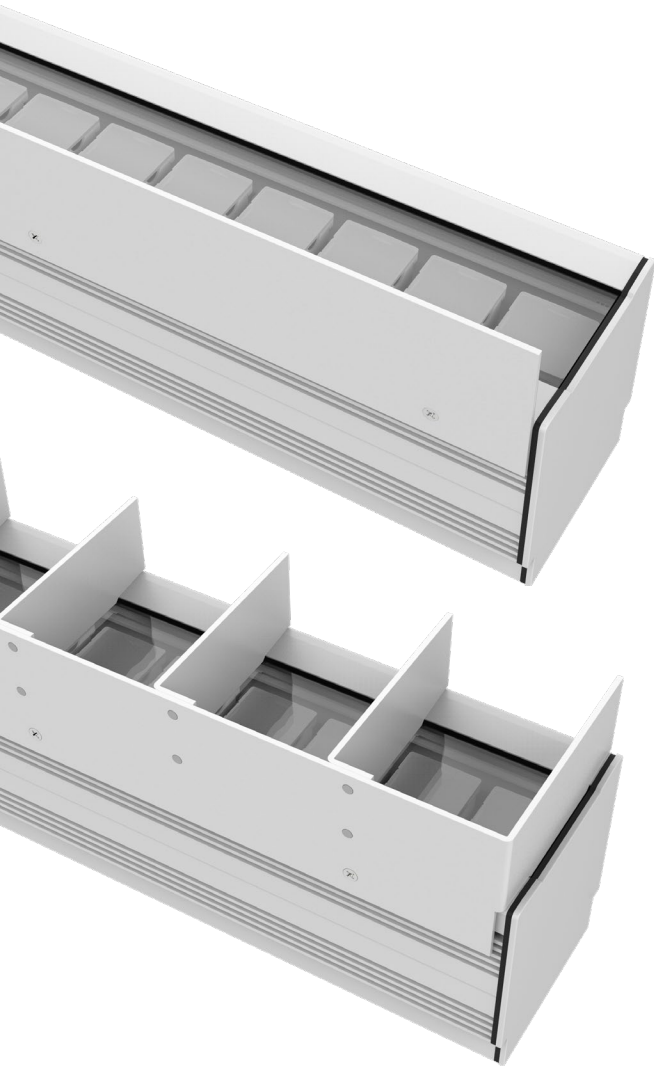

## **ALS600T-RE1**

ALS600T offers a Reflector accessory that gives you more control over the direction of the lighting effect by bouncing the light towards a specific direction.




## **ALS600T-LVR**


ALS600T offers a Louver accessory that helps reduce glare in a variety of applications. The Louver shields the LEDs in harsh environments while producing a more precise light distribution.

# OPTICS FOR THE BEST ILLUMINATION


Now you can illuminate in the most challenging architectural spaces with a wider selection of beam angles that are configurable to fit you lighting design.




120° x 120° Beam  
Clear Lens (GCL)




45° x 60° Beam  
Asymmetric Lens  
(ASM)




10° x 10° Beam  
Optic Lens  
(10D)




15° x 15° Beam  
Optic Lens  
(15D)




25° x 25° Beam  
Optic Lens  
(25D)




30° x 30° Beam  
Optic Lens  
(30D)




45° x 45° Beam  
Optic Lens  
(45D)



60° x 60° Beam  
Optic Lens  
(60D)




15° x 60° Beam  
Optic Lens  
(15Dx60D)




30° x 60° Beam  
Optic Lens  
(30Dx60D)

# MORE MOUNTING OPTIONS. LESS OBSTACLES.

ALS600T offers accessories to solve all installation solutions. By expanding from fixed mounting options to adjustable mounting choices, illuminating in harsh weather conditions just became easier.

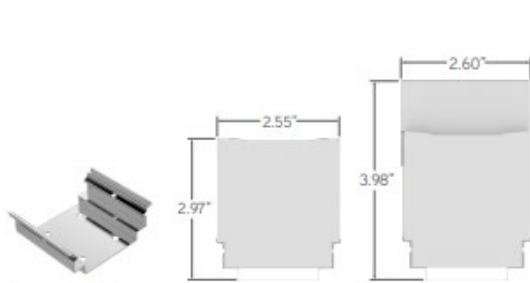

Mounting Clip  
(ALS600T-MC)

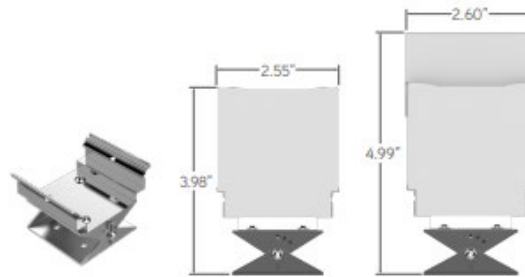


Mounting Clip (Adjustable with Locking Mechanism)  
(ALS600T-MC-3)



Stake Mounting Clip  
(ALS600T-MC-STK)



Bottom Mounting Arm (Adjustable)  
(ALS600T-AA-BM-X)  
(X = Specify Length. 4" Min, 18" Max)

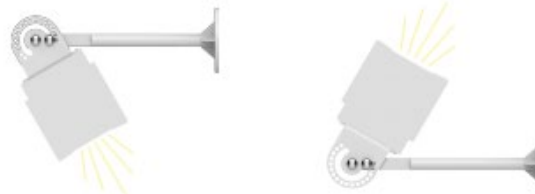

Tilt either direction in 15° increments.  
**Minimum Tilt:** -30° downward, towards mounting surface  
**Maximum Tilt:** 210° upward, towards mounting surface



Side Mounting Arm (Adjustable)  
(ALS600T-AA-SM-X)  
(X = Specify Length. 4" Min, 18" Max)



Tilt either direction in 15° increments.  
**Minimum Tilt:** -105° outward, away from mounting surface  
**Maximum Tilt:** 90° inward, toward mounting surface

# 0-10V Dimming Capability – 100%-1% and 100%-.1%

ALS600T is available in 120 or 277 volts with a dimmable integral driver. The driver has 0-10V dimming capabilities. Consult factory for other dimming protocols available.

- A. 100% to 0% Dimming Driver
  - i. Turns off at 10% dimming, lights up at 10% without the full brightness flash

CALI

**CALIFORNIA ACCENT LIGHTING, INC.**

2820 E. Gretta Lane, Anaheim, CA 92806

ph. 800.921.CALI (2254) | fx. 714.535.7902 | [info@calilighting.com](mailto:info@calilighting.com) | [calilighting.com](http://calilighting.com)

© CALI. All rights reserved. CALI reserves the right to make changes or withdraw specifications without prior notice.

