*alum*LITE™

Manufactured in the U.S.A.

MODEL NUMBER ALS**300P-RG**

FIXTURE TYPE

FEATURES

APPLICATIONS	Accent, Linear Lighting
VOLTAGE	120V
SOCKET BASE	Medium Base
LENGTH	Built to Order
HOUSING	Aluminum Extrusion
LISTING	Dry or Wet Location UL1598, CSA C22.2#250.0 UL8750, CSA250 UL2108, CSA C22.2 #9
LAMPS	LED Lamps (Included) Incandescent Lamps (Not Included)
OPTIONS	Receptacles or Switches

APPLICATIONS

Designed for indoor applications, *alum*LITE is ideal for many applications including the amusement, recreation, and architectural industries. *alum*LITE is used in: Restaurants, Casinos, Street Decorations, Amusement Parks, Shopping Malls, Promenades, and many more.

NOT TO SCALE

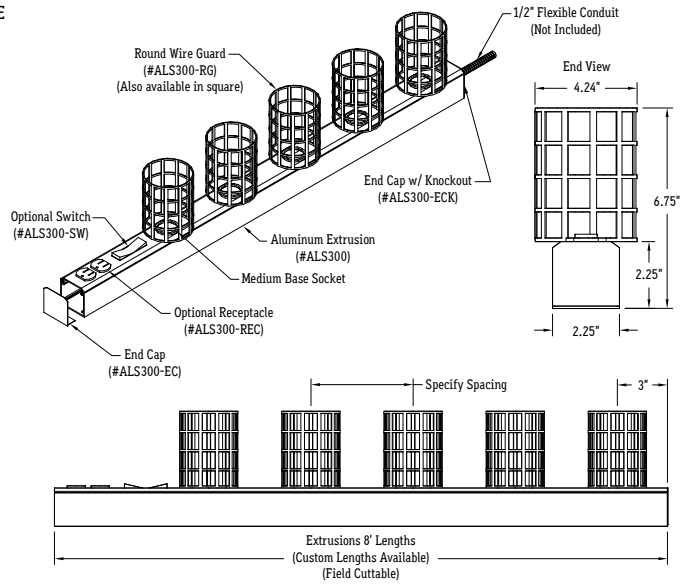

TYPICAL ACCESSORIES (Not Included)



End Cap
(#ALS300P-EC)



End Cap w/ Knockout
(#ALS300P-ECK)



Connecting Coupler
(#ALS300P-CC)

SERIES OPTIONS



Round Guards
(#ALS300P-RG)

SPECIFY PRODUCT CODE (Use drop down menu to complete table or fill in the blanks)

ALS300P-RG _____ - _____ - _____ - _____ - _____ - _____ - _____

SERIES	SPACING	LAMP		LISTING	DIMMING	FINISH	OPTIONAL
Ex. ALS300P-RG	*12"O/C*	*2.7K-GSFW*		*DRY*	*DM*	*NA*	*RG*
ALS300P-RG (Round Guards)	4"O/C*[1]	2.7K-GSF	G-GSFW (Green)	Indoor (DRY)	Forward Phase (DM)	Natural Silver (NA)	Receptacle (REC)
	6 "O/C	5.0K-GSF	2.4K-GSFL		Leave Blank for Non-Dimming	Satin (SA)	Switch (SW)
	8 "O/C	A-GSF (Amber)	2.7K-GSFL	Outdoor (WET)		White (WH)	Receptacle & Switch (REC-SW)
	9 "O/C	R-GSF (Red)	3.0K-GSFL			Anodized Chrome (AC)	Leave Blank for No Additions
	12 "O/C	G-GSF (Green)	5.0K-GSFL			Anodized Black (AB)	
		2.7K-GSFW	2.4K-GSFLW			Anodized Gold (AG)	
		5.0K-GSFW	2.7K-GSFLW			Anodized Bronze (ABR)	
		A-GSFW (Amber)	3.0K- GSFLW				
		R-GSFW (Red)	5.0K-GSFLW				
		Enter 120V Lamp Watts: 120V-					

*[1] 4" O/C is spaced at 4 1/2" from center to center for cages.

CALIFORNIA ACCENT LIGHTING, INC.
2034 E. Lincoln Ave. #431, Anaheim, CA 92806
ph. 800.921.CALI (2254) or 714.535-7900 \ fx. 714.535.7902
info@calilighting.com \ calilighting.com

© CALI. All rights reserved. CALI reserves the right to make changes or withdraw specifications without prior notice.

2019.1.07 R3

alumLITE™
Manufactured in the U.S.A.

MODEL NUMBER **ALS300P-RG**

FIXTURE TYPE

LAMP OPTIONS



LED Lamp G Shape
(#GSF)
360° Beam Angle
20,000 hrs.
80 CRI
42 Lumens

Lamp Temperatures:
2.7K
5.0K
Amber
Red
Green



LED Lamp G Shape
(#GSFW)
360° Beam Angle
15,000 hrs.
90 CRI
350 Lumens

Lamp Temperatures:
2.7K
5.0K
Amber
Red
Green



LED Filament Shape
(#GSFL)
360° Beam Angle
20,000 hrs.
90 CRI
256 Lumens

Lamp Temperatures:
2.4K
2.7K
3.0K
5.0K



LED Filament Shape
(#GSFLW)
360° Beam Angle
15,000 hrs.
90 CRI
350 Lumens

Lamp Temperatures:
2.4K
2.7K
3.0K
5.0K

LAMP SPECIFICATIONS

LAMP SHAPE	DESCRIPTION	TYPE	WATTS (LED)	MAX WATTS	4"O/C	6"O/C	8"O/C	9"O/C	12"O/C
GSF	Polymer Plastic	Frosted	1	600	200'	300'	400'	450'	600'
GSFW	Polymer Plastic	Frosted	3.8	600	52'	78'	104'	117'	157'
GSFL	Clear Glass	Filament	3	600	66'	100'	133'	150'	200'
GSFLW	Clear Glass	Filament	3.8	600	52'	78'	104'	117'	157'
120V	Incandescent Lamp	Clear	Varies by Lamp	1920	Maximum Run Based on Lamp Watts				

ACCESSORIES FOR SHAPES AND CONTINUOUS RUNS (Not Included)



90° Flat Elbow
(#ALS300P-FE)



T-Connector
(#ALS300P-TC)



X-Connector
(#ALS300P-XC)



90° Internal Elbow
(#ALS300P-IE)



90° Flat Elbow with Socket
(#ALS300P-FES)



T-Connector with Socket
(#ALS300P-TCS)



X-Connector with Socket
(#ALS300P-XCS)



90° External Elbow
(#ALS300P-EE)

CUSTOM CURVING (Not Included)

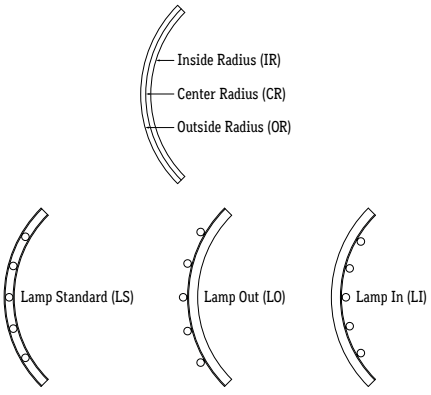

CALIFORNIA ACCENT LIGHTING, INC.
2034 E. Lincoln Ave. #431, Anaheim, CA 92806
ph. 800.921.CALI (2254) or 714.535-7900 \ fx. 714.535.7902
info@calilighting.com \ calilighting.com

© CALI. All rights reserved. CALI reserves the right to make changes or withdraw specifications without prior notice.