


± 0.15" Tolerance

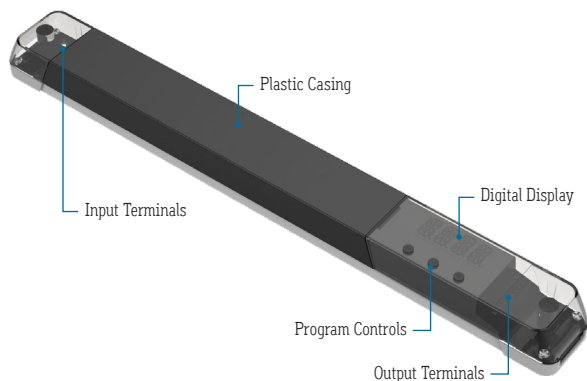

## FEATURES


<b>APPLICATIONS</b>	RDM LED Lighting
<b>BEST USE</b>	Remote Driver
<b>CONSTRUCTION</b>	Plastic Housing
<b>FINISH</b>	Black
<b>WEIGHT</b>	1.55 lbs
<b>SIZE</b>	15.27" (L) x 1.65" (W) x 1.18" (H)
<b>MOUNTING</b>	Mounting Holes
<b>DIMMING</b>	
<b>DIMMING PROTOCOL</b>	DMX, DALI
<b>DIMMING RANGE</b>	100% - 0.1%
<b>INPUT</b>	
<b>INPUT VOLTAGE</b>	Universal Voltage (120V - 277V AC)
<b>INPUT FREQUENCY</b>	50 / 60 Hz
<b>MAX INPUT CURRENT</b>	1.05A @ 120V / 60 Hz
<b>OUTPUT</b>	
<b>OUTPUT VOLTAGE</b>	12V - 24V DC
<b>OUTPUT POWER</b>	100 Watts
<b>OUTPUT CURRENT</b>	2.8A
<b>TECHNICAL SPECIFICATIONS</b>	
<b>CLASS</b>	2
<b>RATING</b>	Indoor
<b>LISTING</b>	UL 1310, UL 8750
<b>OPERATING TEMPERATURE</b>	-20°C to +50°C
<b>TCASE</b>	70°C
<b>DMX</b>	E1.11 - 2008, USITT DMX512-A, ANSI E1.20
<b>DALI</b>	EN 62386-101/102/207
<b>RoHS</b>	RoHS3 (Directives 2011/65/EU-2015/863/EU)
<b>MAX THD</b>	< 10% At Full Load
<b>POWER FACTOR</b>	> 0.94 At Full Load
<b>EFFICIENCY</b>	83% At Full Load
<b>PROTECTIONS</b>	Surge Circuit

PROJECT

TYPE



## WIRING DIAGRAM OF DRIVER

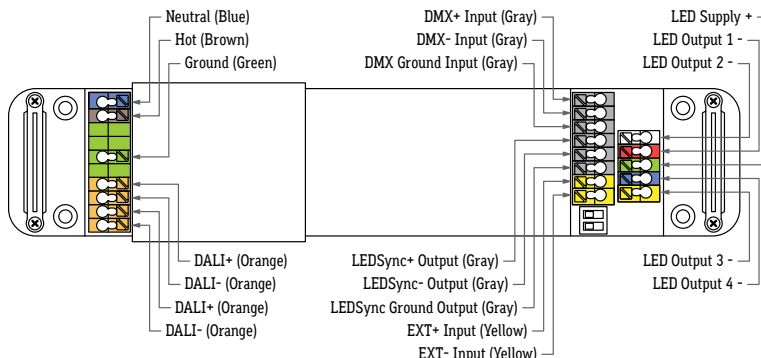

## COMPATIBLE PRODUCTS

### AlumLEDs Series

- ALS50T
- ALS50T-C
- ALS50T-R
- ALS50T-MI
- ALS210T
- ALS210T-FC
- ALS210T-LP
- ALS250T
- ALS250T-FC
- ALS450T
- ALS500T
- ALS500T-DBR
- ALS500T-DPM
- ALS500T-RMW
- ALS500T-SMQ
- ALS500T-SMR
- ALS500T-SQ
- ALS500T-SWM
- ALS600T
- ALS600T-AD
- ALS800T
- ALS900T

### LipLEDs Series

- LLED8300
- LLED8350
- LLED8500
- LLED8550
- LLED8600
- LLED8650

### AisleLITE Series

- AIL1700
- AIL1800
- AIL2000

### StepLITE Series

- STL6125
- STL6150
- STL6175
- STL6200
- STL6400
- STL6500
- STL6550
- STL6600
- STL6700

### WallLITE Series

- WL6950

**Note:** Drivers are not available for individual purchase. Drivers may only be ordered as a replacement for an existing order. Consult Factory for ordering options and requirements.

SERIES	PRIMARY VOLTAGE	SECONDARY VOLTAGE	DIMMING	LISTING
DRV100-E	- UNV	- 24VDC	-	- DRY
DRV100-E	Universal: 120V - 277V (UNV)	24 Volts (24VDC)	DALI (DALI) DMX-512 (DMX)	Indoor (DRY)