




CALIFORNIA
ACCENT
LIGHTING
INC

LLED9150-F-UC | INSTALLATION


Perspective View



Assembled End View





1. Measure area where fixtures will be installed. Use a chalk line to ensure a straight installation.
2. Mark location where mounting channel will be installed. Use 1 mounting clip per 2'.
Note: Cut mounting channel 2-1/2" shorter than lightstrip to leave room for end caps.
3. Prepare mounting channel for mounting by removing inner channel.





Remove Inner Channel

4. Lay mounting channel along chalk line and drill at least 3 countersink holes per channel. Drill additional holes as needed.
5. Screw mounting channel to surface using countersink screws, then replace inner channel.
Note: Countersink screws must be flush with surface of outer channel

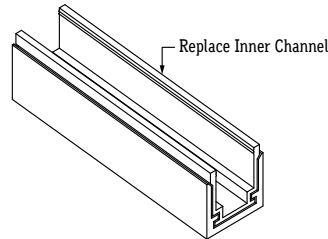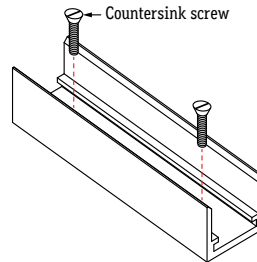

6. Press assembled fixture into mounting channel it has been securely mounted.

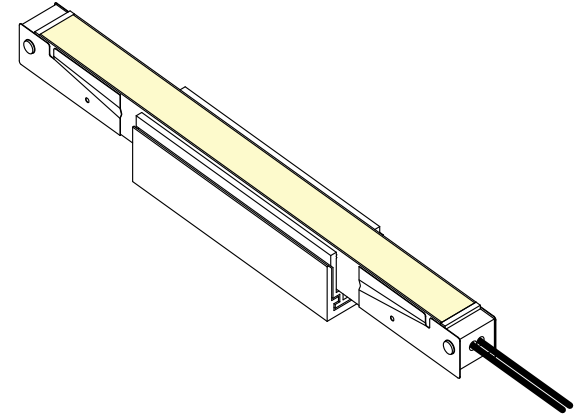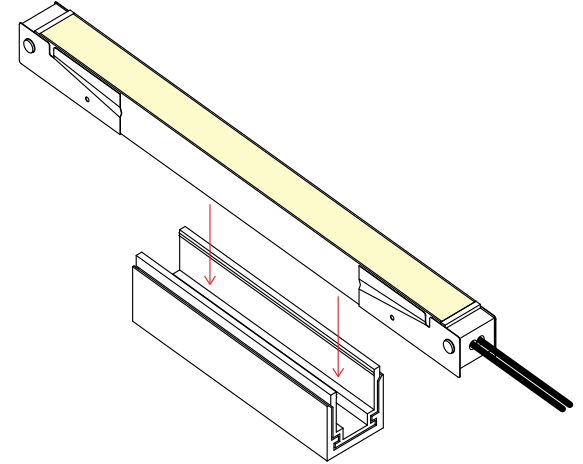

7. If applicable, connect disconnects between fixtures.
8. Perform continuity test before connecting fixtures to power source.