

FEATURES

APPLICATIONS	Accent, Tree Lighting
VOLTAGE	24VDC
LAMP TYPE	LEDs
SOCKET	Custom
LENGTH	Built to Order
CONSTRUCTION	Flexible Wire / Polycarbonate Lens
WIRING	Parallel
MOUNTING	Tie Wraps
LISTING	Dry or Wet Location
DIMMING	Forward Phase (TRA)


APPLICATIONS

Designed for indoor or outdoor use, treeLITE series is ideal for many applications including the amusement, recreation, and architectural industries. treeLITE is excellent for decorative lighting, accent lighting, tree lighting, and many more applications.


ELECTRICAL

treeLITE is a 24 Volt DC system. treeLITE requires a 24VDC (secondary side) transformer. The standard primary side voltage on our transformers is 120V or 277V. Consult factory for other primary side voltages.

ACCESSORIES (Not Included)




End Cap
(#TRL3500-EC)



Power Connector w/ Housing
(#TRL3500-PCH)

NOT TO SCALE

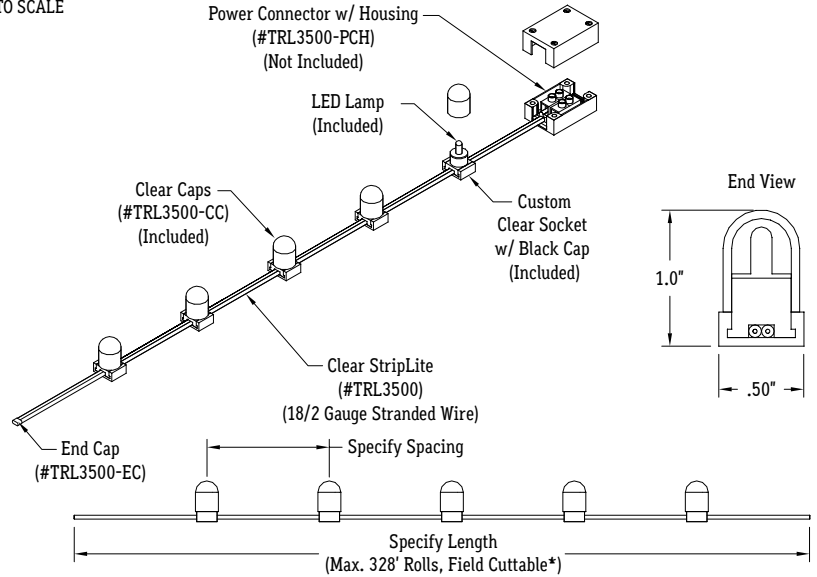

SPECIFY PRODUCT CODE (Use drop down menu to complete table or fill in the blanks)

TRL3500				CC
SERIES	SPACING	LAMP	LISTING	CAPS
Ex. TRL3500	12"	LED-2.7K	WET	CC
TRL3500	2" O/C	LED-2.7K	Indoor (DRY)	Clear (CC)
	3" O/C	LED-5.0K		
	4" O/C	LED-R	Outdoor (WET)	
	6" O/C	LED-G		
	8" O/C	LED-B		
	12" O/C	LED-A		

LAMP SPECIFICATIONS

LAMP NUMBER	DESCRIPTION	LAMP LIFE	WATTS	MAX LAMPS	2" O/C (1.5W/FT)	3" O/C (1W/FT)	4" O/C (.75W/FT)	6" O/C (.5W/FT)	8" O/C (.375W/FT)	12" O/C (.25W/FT)
LED-2.7K	2700K Warm White	100,000 hrs.	.25	200	33'	53'	66'	100'	133'	200'
LED-5.0K	5000K Cool White	100,000 hrs.	.25	200	33'	53'	66'	100'	133'	200'
LED-A	Amber	100,000 hrs.	.25	200	33'	53'	66'	100'	133'	200'
LED-R	Red	100,000 hrs.	.25	200	33'	53'	66'	100'	133'	200'
LED-G	Green	100,000 hrs.	.25	200	33'	53'	66'	100'	133'	200'
LED-B	Blue	100,000 hrs.	.25	200	33'	53'	66'	100'	133'	200'