


Drawing # STL6700

Manufactured in U.S.A.

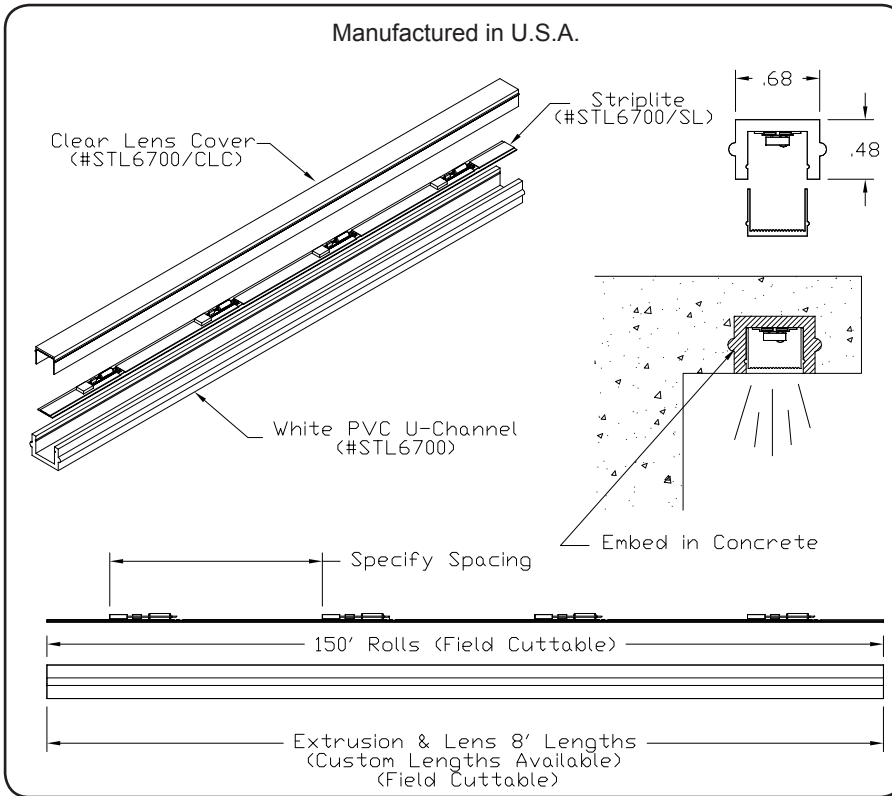

Fixture Type

Product Features

- Applications:** Step Lighting
- Voltage:** 12V
- Lamp Type:** LEDs or Incandescent
- Socket:** Custom
- Length:** Built to Order
- Construction:** Black Vinyl Extrusion
- Wiring:** Parallel Wiring
- Mounting:** Adhesive
- Listing:** Dry or Wet Location

Applications

Designed for indoor or outdoor use, StepLite Series is ideal for many applications including the amusement, recreation, and architectural industries. StepLite is excellent for path lighting, step lighting, accent lighting, and many more applications.

StepLite is used in:

- Restaurants
- Casinos
- Retail Stores/Shopping Malls
- Hotels
- Movie Theatres and many more

Electrical

StepLite is a 12 Volt system. StepLite requires a 12V (secondary side) transformer. The standard primary side voltage on our transformers is 120V. Consult factory for other primary side voltages (example: 277V). A thermal breaker box can be used for secondary protection. See Transformer Brochure.

How to Order or Specify

Product Code: (Fill in the Blanks)

STL6700 / _____ / _____ / _____ / _____

Ex: STL6700	6"	LED-3.0K	CL	Wet
Series	Spacing	Lamp	Lens	Dry or Wet
STL6700	1" O/C	LED-3.0K	Clear (CL)	Indoor (Dry)
	1.5" O/C	LED-5.0K	Smoke (SL)	Outdoor (Wet)
	2" O/C	LED-R		
	3" O/C	LED-G		
	4" O/C	LED-B		
	6" O/C	LED-A		
	8" O/C	IN-A		
	12" O/C	IN-B		

Lamp Specifications

Lamp #	Description	Lamp Life	Watts	Max. Lamps	1.5" O/C	2" O/C	3" O/C	4" O/C	6" O/C	8" O/C	12" O/C
LED-3.0K	Warm White LED 3000K	50,000 hrs.	.45	400	50'	66'	100'	133'	200'	266'	400'
LED-5.0K	Cool White LED 5000K	50,000 hrs.	.45	400	50'	66'	100'	133'	200'	266'	400'
LED-A	Amber LED	100,000 hrs.	.45	40'	40'	50'	80'	133'	200'	266'	200'
LED-R	Red LED	100,000 hrs.	.45	400	50'	66'	100'	133'	200'	266'	400'
LED-G	Green LED	100,000 hrs.	.45	400	50'	66'	100'	133'	200'	266'	400'
LED-B	Blue LED	100,000 hrs.	.45	400	50'	66'	100'	133'	200'	266'	400'
IN-A	.33 Watt Incandescent	80,000 hrs.	.33	500	60'	80'	125'	160'	250'	330'	500'
IN-B	.86 Watt Incandescent	90,000 hrs.	.86	209	26'	30'	50'	65'	100'	130'	200'

Date:		Specifier:		Project:	
-------	--	------------	--	----------	--



2034 E. Lincoln Ave. # 431 • Anaheim, CA 92806
 TF: 800.921.CALI (2254) • PH: 714-535-7900 • FX: 714.535.7902
 Web site: www.calilighting.com • E-mail: info@calilighting.com



Notes



2034 E. Lincoln Ave. # 431 • Anaheim, CA 92806
TF: 800.921.CALI (2254) • PH: 714-535-7900 • FX: 714.535.7902
Web site: www.calilighting.com • E-mail: info@calilighting.com

